



# EECS 442 – Computer vision

## Multiple view geometry


## Affine structure from Motion

- Affine structure from motion problem
- Algebraic methods
- Factorization methods

Reading: [HZ] Chapters: 6,14,18  
[FP] Chapter: 12

Some slides of this lectures are courtesy of prof. J. Ponce,  
prof FF Li, prof S. Lazebnik & prof. M. Hebert


# Structure from motion problem

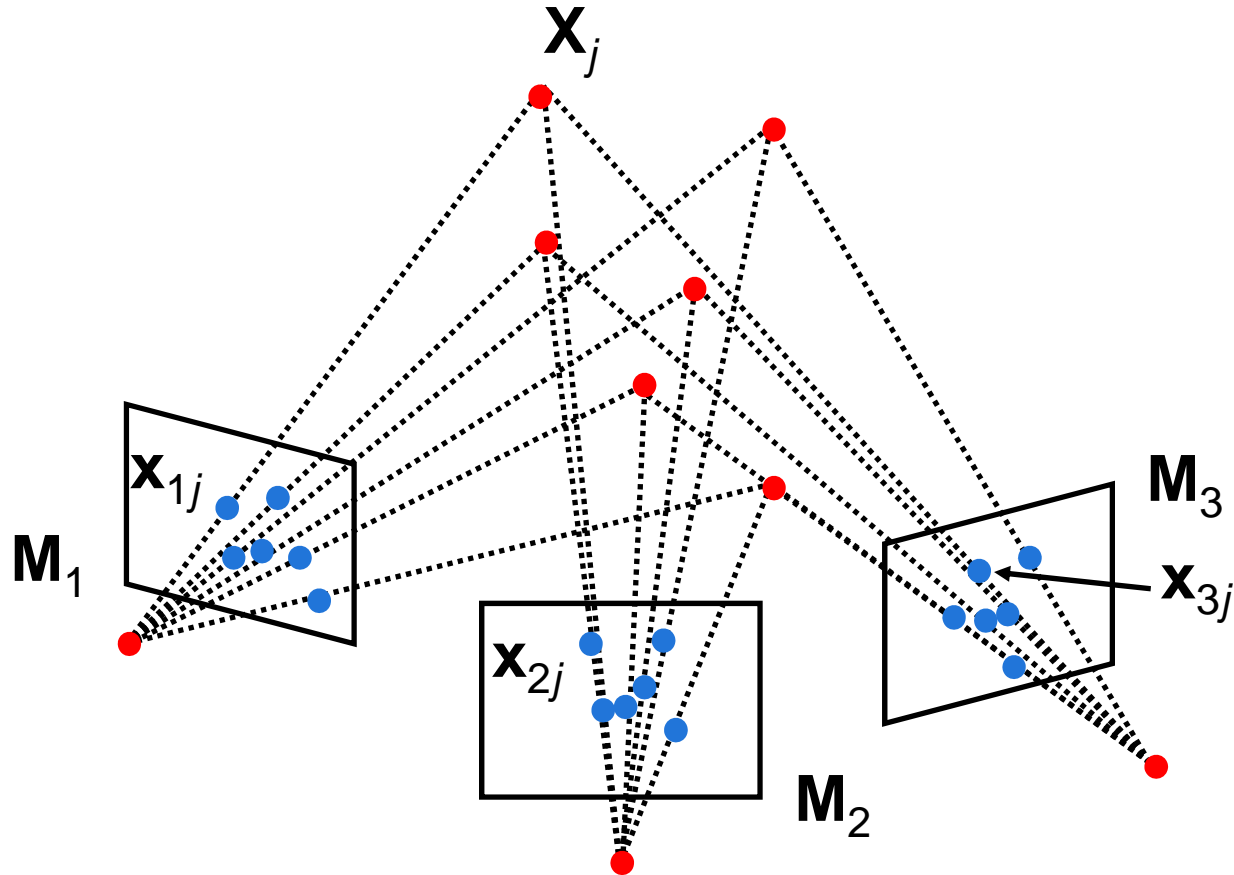

Given  $m$  images of  $n$  fixed 3D points

$$\bullet \mathbf{x}_{ij} = \mathbf{M}_i \mathbf{X}_j, \quad i = 1, \dots, m, \quad j = 1, \dots, n$$

# Structure from motion problem

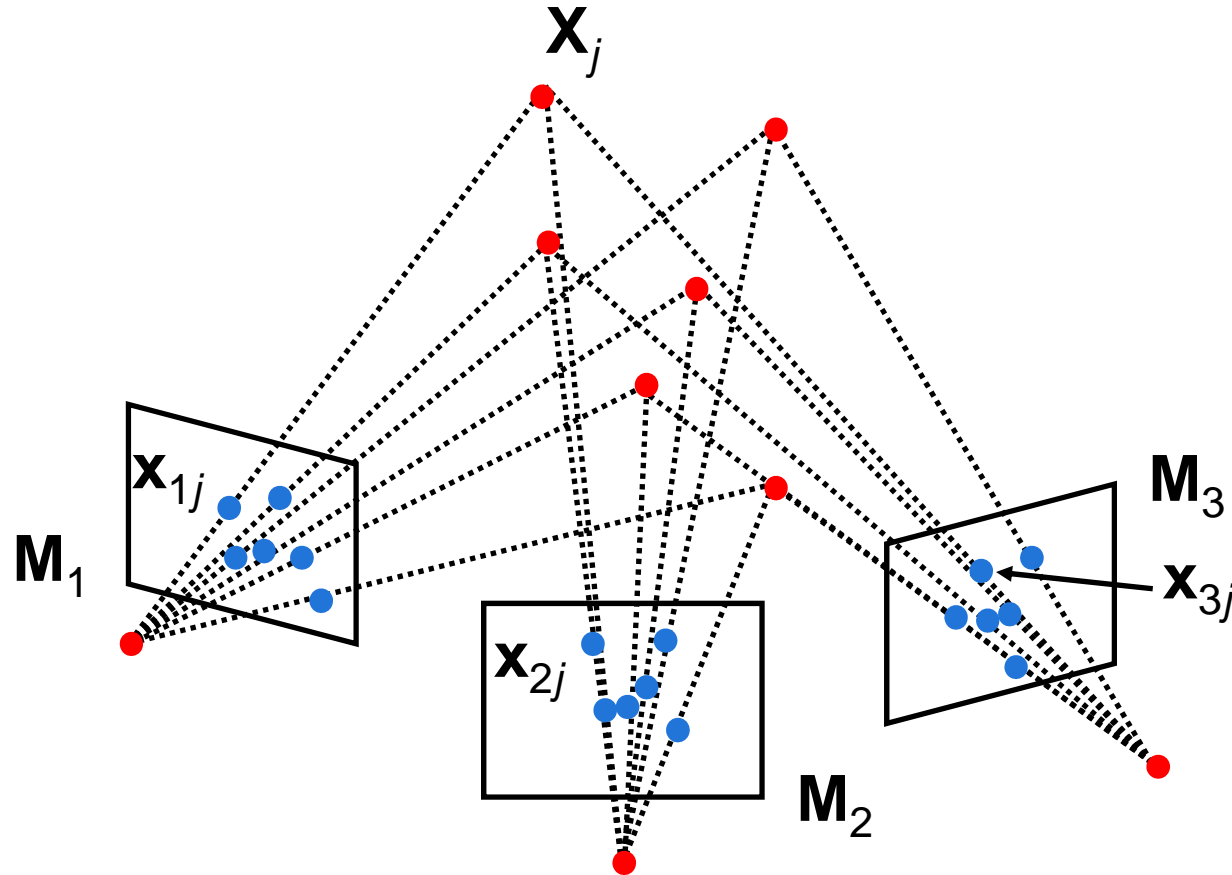

From the  $m \times n$  correspondences  $x_{ij}$ , estimate:

•  $m$  projection matrices  $M_i$


•  $n$  3D points  $X_j$

motion

structure

# Affine structure from motion


(simpler problem)

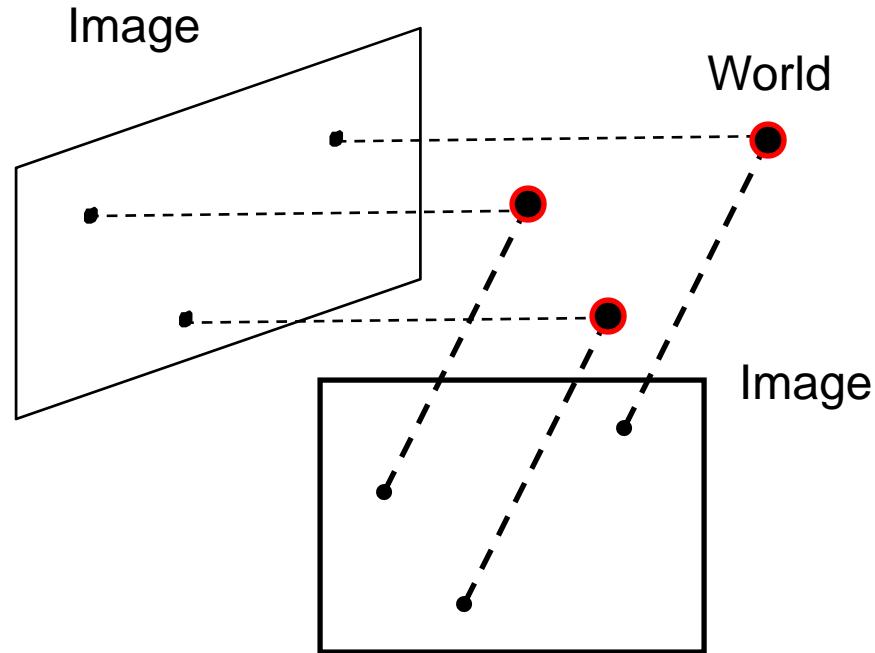

From the  $m \times n$  correspondences  $\mathbf{x}_{ij}$ , estimate:

- $m$  projection matrices  $\mathbf{M}_i$  (affine cameras)
- $n$  3D points  $\mathbf{X}_j$

# Finite cameras

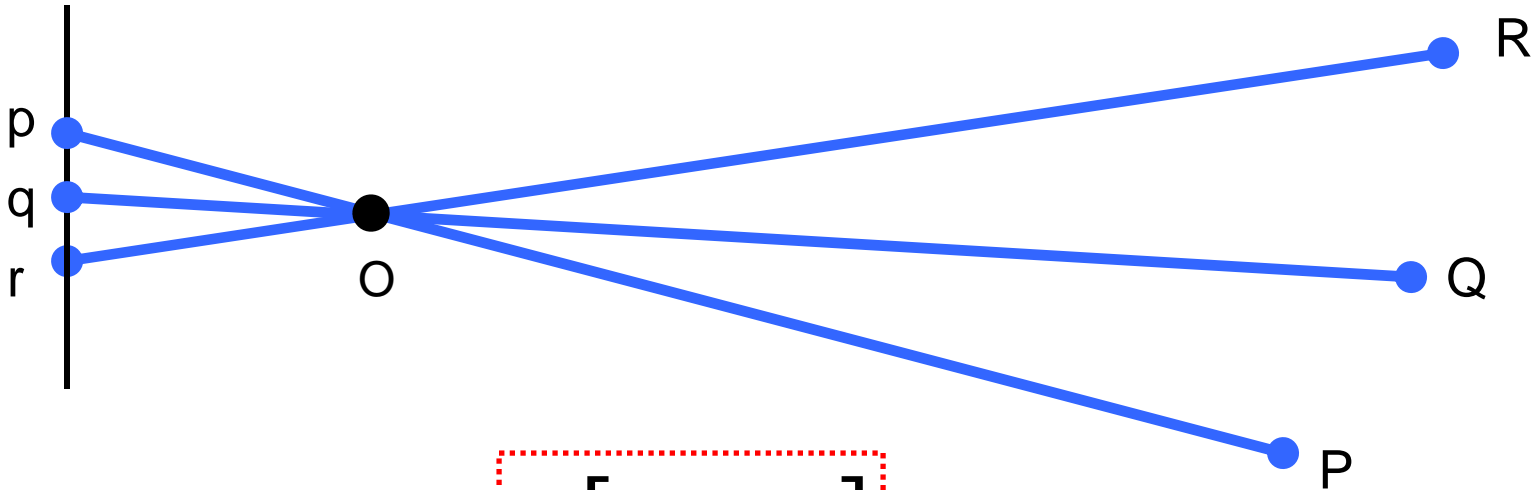

$$x = \mathbf{K} \begin{bmatrix} \mathbf{R} & \mathbf{T} \end{bmatrix} X$$

$\mathbf{M}$

Perspective projection matrix

$$\mathbf{K} = \begin{bmatrix} \alpha_x & s & x_o \\ 0 & \alpha_y & y_o \\ 0 & 0 & 1 \end{bmatrix}$$

$$\mathbf{M} = \mathbf{K}_{3 \times 3}$$

Homography  
(in 2D)

$$\begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix}$$

$$\begin{bmatrix} \mathbf{R} & \mathbf{T} \\ 0 & 1 \end{bmatrix}$$

Homography (in 3D)

# Affine cameras

$$\mathbf{x} = \mathbf{K}[\mathbf{R} \quad \mathbf{T}]\mathbf{X}$$

Projective case

$$\mathbf{K} = \begin{bmatrix} \alpha_x & s & x_o \\ 0 & \alpha_y & y_o \\ 0 & 0 & 1 \end{bmatrix} \quad \mathbf{M} = \mathbf{K} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} \mathbf{R} & \mathbf{T} \\ 0 & 1 \end{bmatrix}$$


Affine case

$$\mathbf{K} = \begin{bmatrix} \alpha_x & s & 0 \\ 0 & \alpha_y & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \mathbf{M} = \mathbf{K} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \mathbf{R} & \mathbf{T} \\ 0 & 1 \end{bmatrix}$$

Parallel projection matrix  
(points at infinity are mapped as points at infinity)


# Orthographic Projection

$$\mathbf{K} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

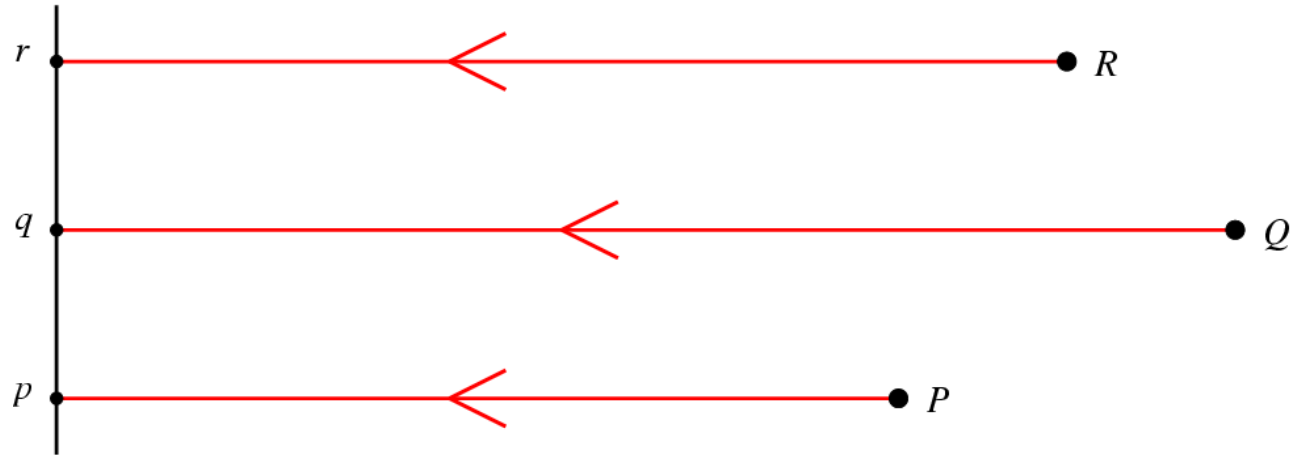


# Weak-Perspective Projection

$$\mathbf{K} = \begin{bmatrix} \alpha_x & 0 & 0 \\ 0 & \alpha_y & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

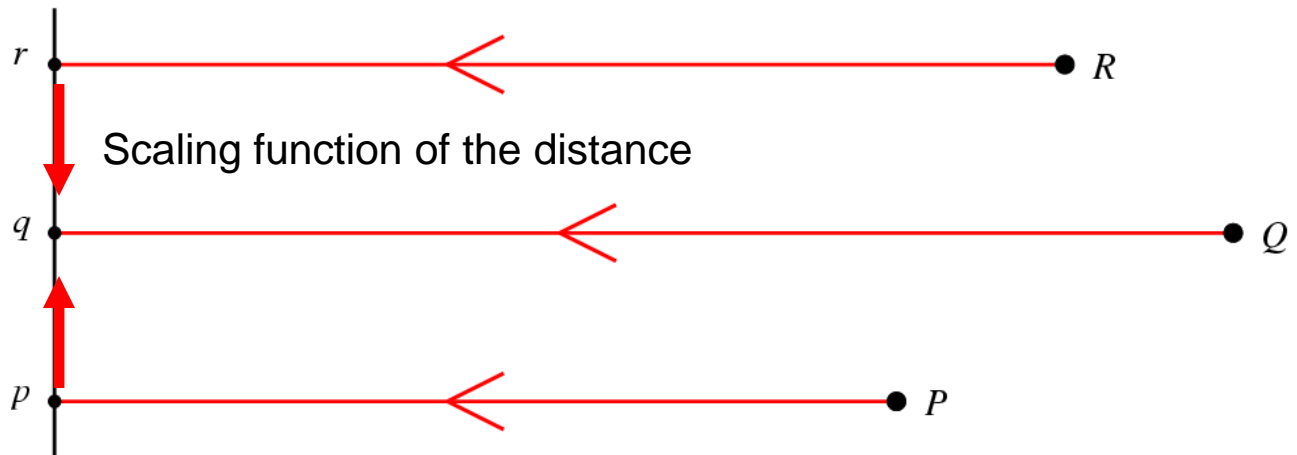


# Orthographic Projection

$$\mathbf{K} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

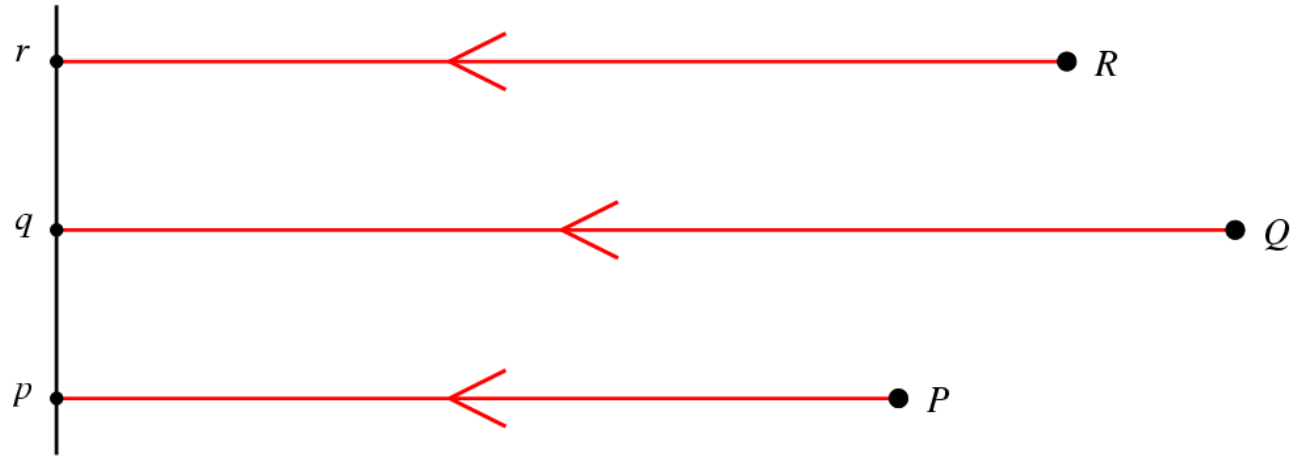

# Weak-Perspective Projection

$$\mathbf{K} = \begin{bmatrix} \alpha_x & 0 & 0 \\ 0 & \alpha_y & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

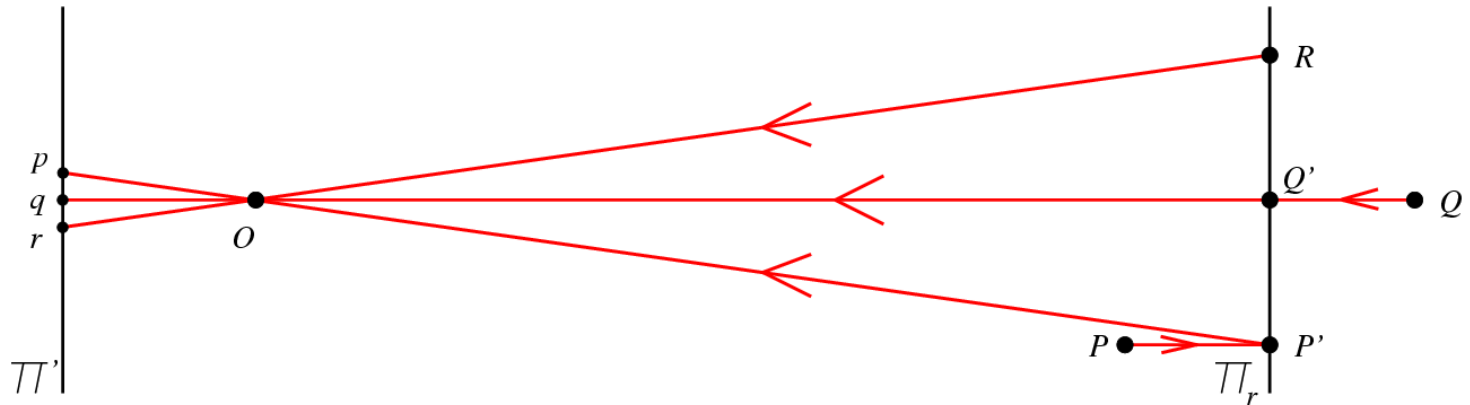



# Affine cameras

$$\mathbf{x} = \mathbf{K} \begin{bmatrix} \mathbf{R} & \mathbf{T} \end{bmatrix} \mathbf{X} \quad [\text{Homogeneous}]$$


$$\mathbf{K} = \begin{bmatrix} \alpha_x & s & 0 \\ 0 & \alpha_y & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \mathbf{M} = \mathbf{K} \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} \mathbf{R} & \mathbf{T} \\ 0 & 1 \end{bmatrix}$$

$$\mathbf{M} = [3 \times 3 \text{ affine}] \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} [4 \times 4 \text{ affine}] = \begin{bmatrix} a_{11} & a_{12} & a_{13} & b_1 \\ a_{21} & a_{22} & a_{23} & b_2 \\ 0 & 0 & 0 & 1 \end{bmatrix} = \begin{bmatrix} \mathbf{A} & \mathbf{b} \\ \mathbf{0} & \mathbf{1} \end{bmatrix}$$

$$\mathbf{x} = \begin{pmatrix} x \\ y \end{pmatrix} = \begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \end{bmatrix} \begin{pmatrix} X \\ Y \\ Z \end{pmatrix} + \begin{pmatrix} b_1 \\ b_2 \end{pmatrix} = \mathbf{A}\mathbf{X} + \mathbf{b} = \mathbf{M}_{\text{Euc}} \begin{bmatrix} \mathbf{X} \\ 1 \end{bmatrix}; \quad [\text{non-homogeneous image coordinates}]$$

$$\mathbf{M}_{\text{Euc}} = \mathbf{M} = \begin{bmatrix} \mathbf{A} & \mathbf{b} \end{bmatrix}$$

# Affine cameras

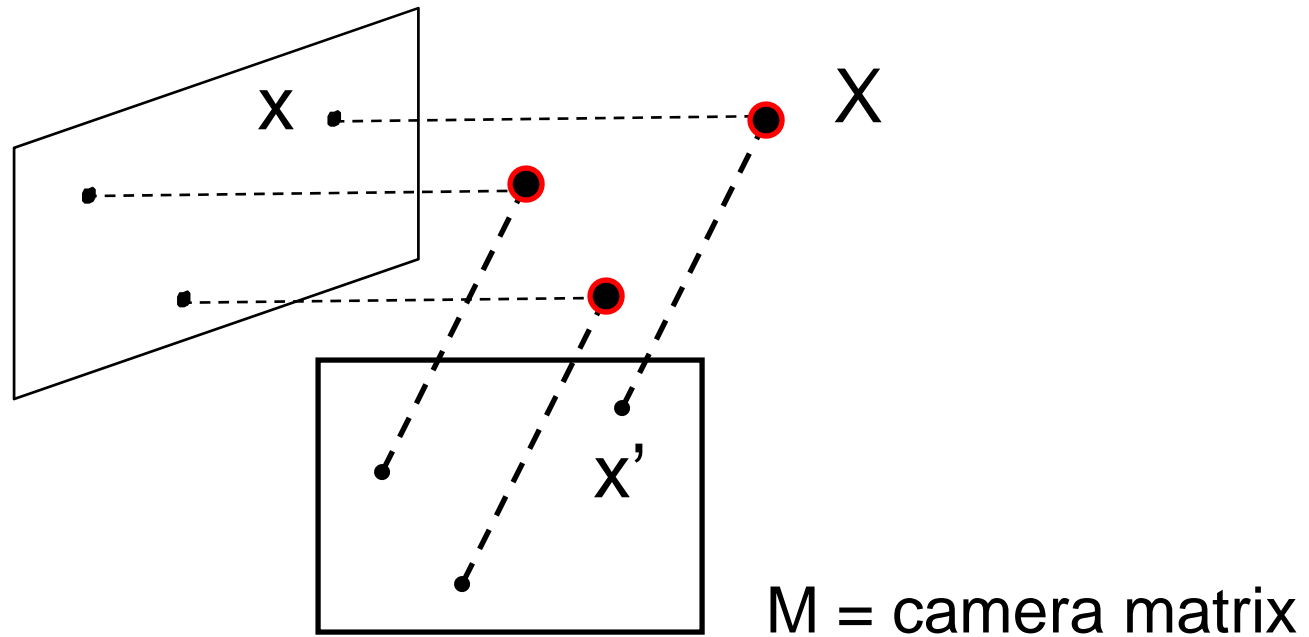

To recap:

from now on we define  $M$  as the camera matrix for the affine case

$$\mathbf{x} = \begin{pmatrix} x \\ y \end{pmatrix} = \mathbf{A}\mathbf{X} + \mathbf{b} = \mathbf{M} \begin{bmatrix} \mathbf{X} \\ 1 \end{bmatrix}; \quad \mathbf{M} = \begin{bmatrix} \mathbf{A} & \mathbf{b} \end{bmatrix}$$

# The Affine Structure-from-Motion Problem

Given  $m$  images of  $n$  fixed points  $P_j$  ( $=X_i$ ) we can write

$$\mathbf{p}_{ij} = \mathcal{M}_i \begin{pmatrix} \mathbf{P}_j \\ 1 \end{pmatrix} = \mathcal{A}_i \mathbf{P}_j + \mathbf{b}_i \quad \text{for } i = 1, \dots, m \quad \text{and } j = 1, \dots, n.$$

Problem: estimate the  $m$   $2 \times 4$  matrices  $M_i$  and the  $n$  positions  $P_j$  from the  $m \times n$  correspondences  $\mathbf{p}_{ij}$ .


How many equations and how many unknowns?

$2m \times n$  equations in  $8m+3n$  unknowns


## Two approaches:

- Algebraic approach (affine epipolar geometry)
- Factorization method

# Algebraic analysis (2-view case)

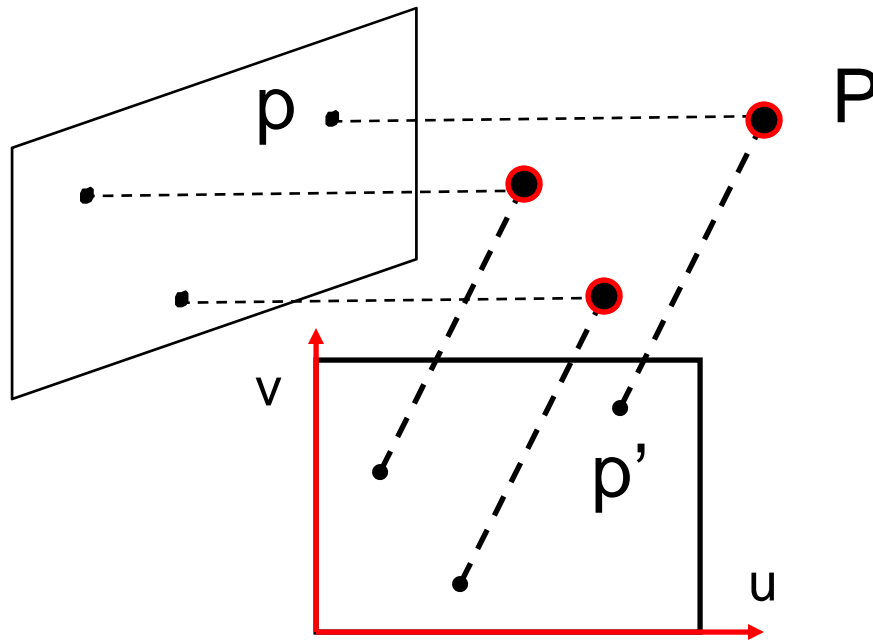

$$\begin{cases} \mathbf{p} = \mathcal{A}\mathbf{P} + \mathbf{b} \\ \mathbf{p}' = \mathcal{A}'\mathbf{P} + \mathbf{b}' \end{cases}$$



Homogeneous system


$$\begin{pmatrix} \mathcal{A} & \mathbf{p} - \mathbf{b} \\ \mathcal{A}' & \mathbf{p}' - \mathbf{b}' \end{pmatrix} \begin{pmatrix} \mathbf{P} \\ -1 \end{pmatrix} = \mathbf{0}$$

$$\Rightarrow \text{Det} \begin{pmatrix} \mathcal{A} & \mathbf{p} - \mathbf{b} \\ \mathcal{A}' & \mathbf{p}' - \mathbf{b}' \end{pmatrix} = 0 \Rightarrow$$

$$\alpha u + \beta v + \alpha' u' + \beta' v' + \delta = 0$$

# Algebraic analysis (2-view case)


$$\alpha u + \beta v + \alpha' u' + \beta' v' + \delta = 0$$





$$(u, v, 1) \mathcal{F} \begin{pmatrix} u' \\ v' \\ 1 \end{pmatrix} = 0 \quad \text{where} \quad \mathcal{F} \stackrel{\text{def}}{=} \begin{pmatrix} 0 & 0 & \alpha \\ 0 & 0 & \beta \\ \alpha' & \beta' & \delta \end{pmatrix}$$

The Affine Fundamental Matrix!

# Affine Epipolar Geometry

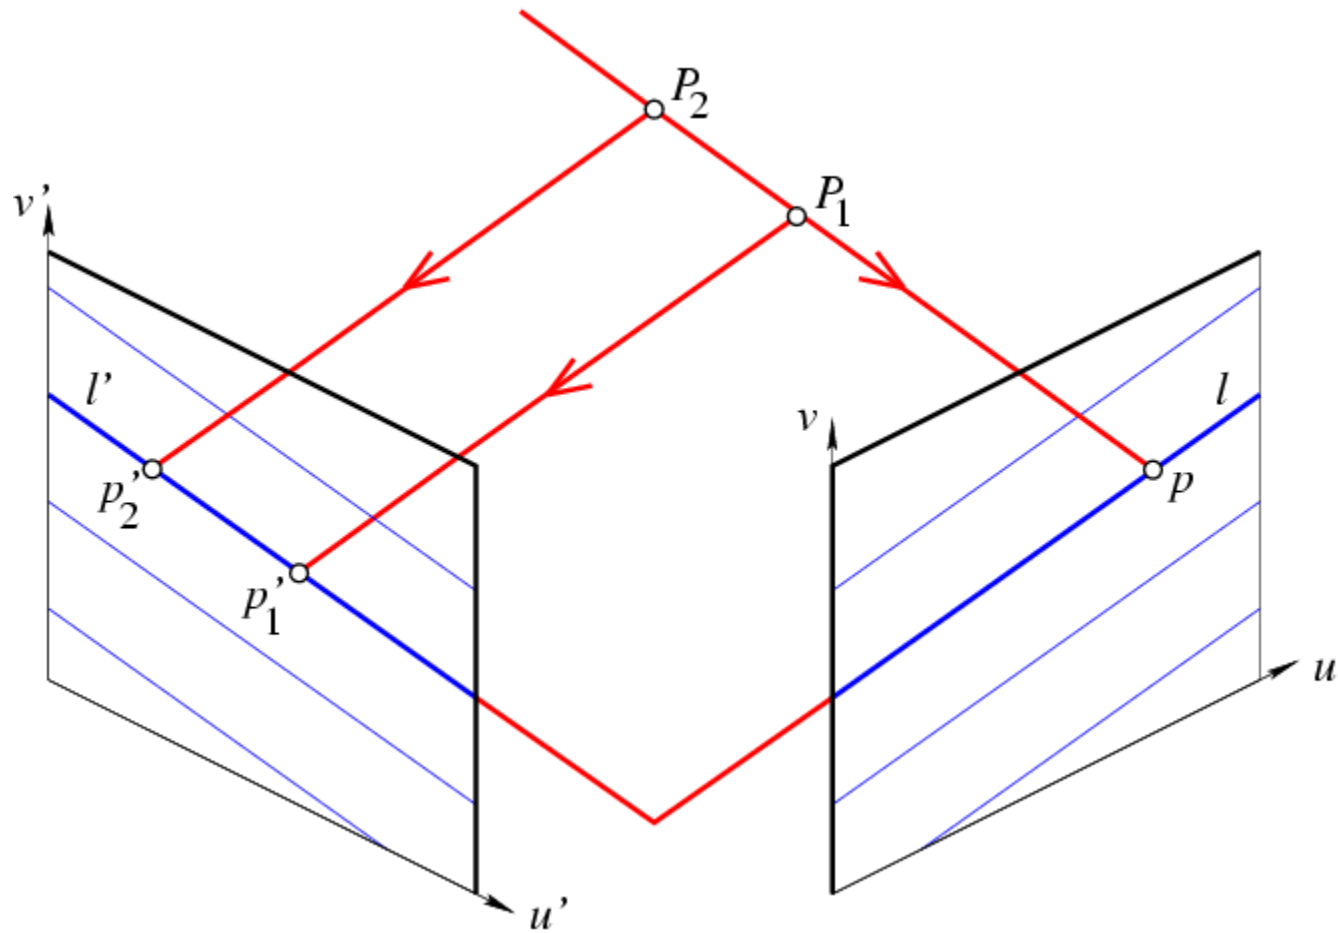

Note: the epipolar lines are parallel.

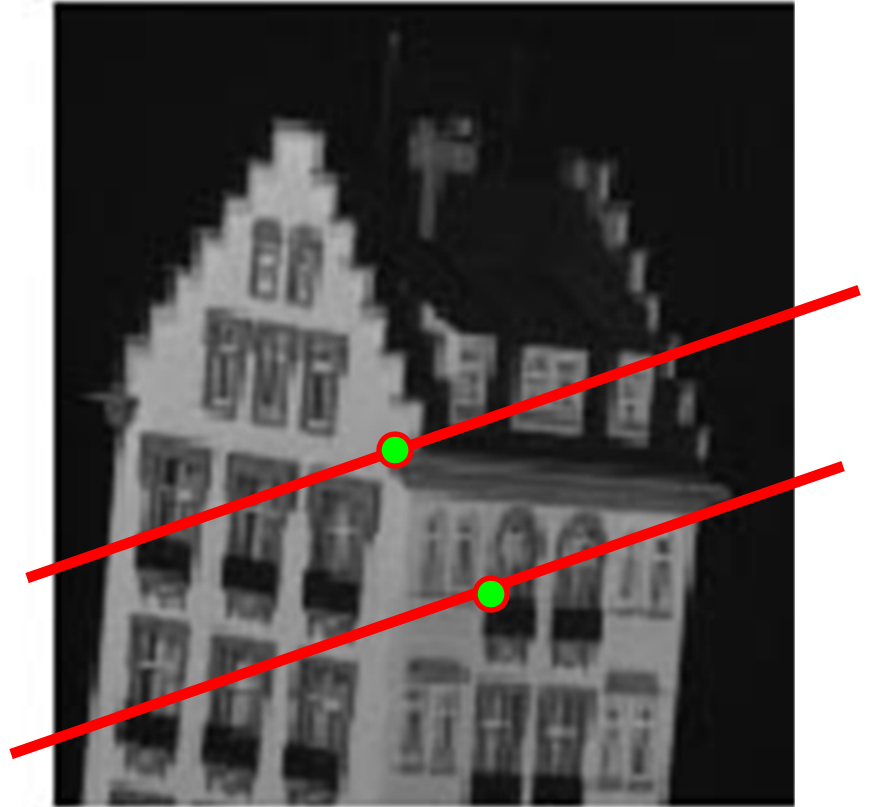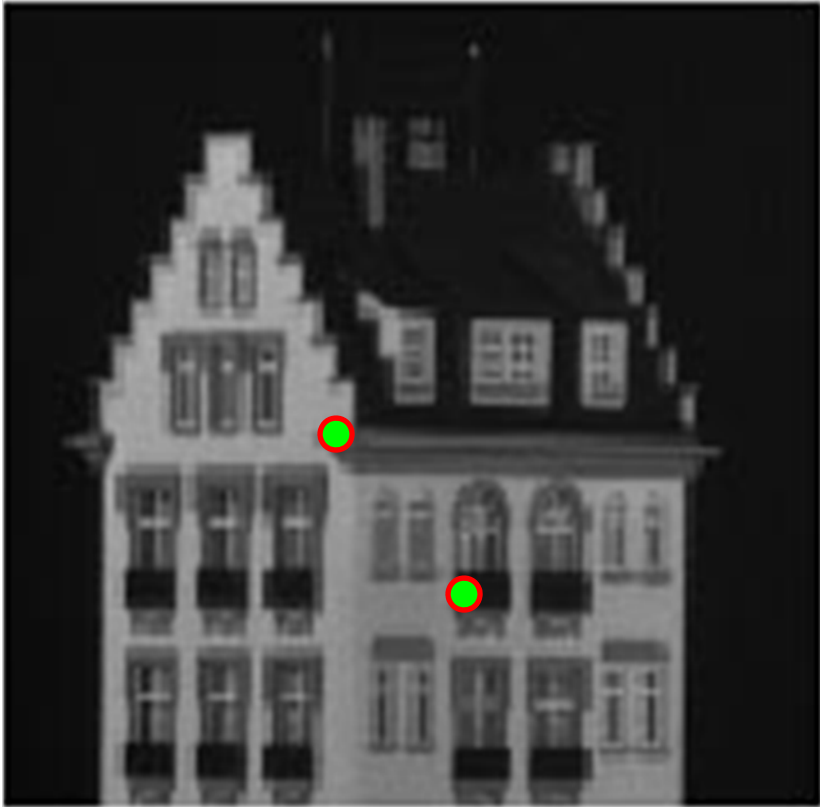

# Estimating F

$$\alpha u + \beta v + \alpha' u' + \beta' v' + \delta = 0$$

- Measurements:  $u, u', v, v'$
- From at least 4 correspondences, we obtain a linear system on the unknown alpha, beta, etc...

$$\begin{bmatrix} \mathbf{u}'_1 & \mathbf{v}'_1 & \mathbf{u}_1 & \mathbf{v}_1 & 1 \\ \vdots & \vdots & \vdots & \vdots & \vdots \\ \mathbf{u}'_n & \mathbf{v}'_n & \mathbf{u}_n & \mathbf{v}_n & 1 \end{bmatrix} \mathbf{f} = \mathbf{0}$$

- Computed by least square and by enforcing  $|\mathbf{f}|=1$



# Estimating projection matrices from epipolar constraints

If  $M_i$  and  $P_j$  are solutions,  
then  $M_i'$  and  $P_j'$  are also solutions,

where

$$\mathcal{M}'_i = \mathcal{M}_i \mathcal{Q} \quad \text{and} \quad \begin{pmatrix} \mathbf{P}'_j \\ 1 \end{pmatrix} = \mathcal{Q}^{-1} \begin{pmatrix} \mathbf{P}_j \\ 1 \end{pmatrix}$$

and


$$\mathcal{Q} = \begin{pmatrix} \mathbf{C} & \mathbf{d} \\ \mathbf{0}^T & 1 \end{pmatrix} \quad \text{with} \quad \mathcal{Q}^{-1} = \begin{pmatrix} \mathbf{C}^{-1} & -\mathbf{C}^{-1}\mathbf{d} \\ \mathbf{0}^T & 1 \end{pmatrix}$$

Q is an affine transformation.

Proof:


$$\mathbf{p}_{ij} = \mathcal{M}_i \begin{pmatrix} \mathbf{P}_j \\ 1 \end{pmatrix} = (\mathcal{M}_i \mathcal{Q}) \left( \mathcal{Q}^{-1} \begin{pmatrix} \mathbf{P}_j \\ 1 \end{pmatrix} \right) = \mathcal{M}'_i \begin{pmatrix} \mathbf{P}'_j \\ 1 \end{pmatrix} \quad \blacksquare$$

# Affine ambiguity

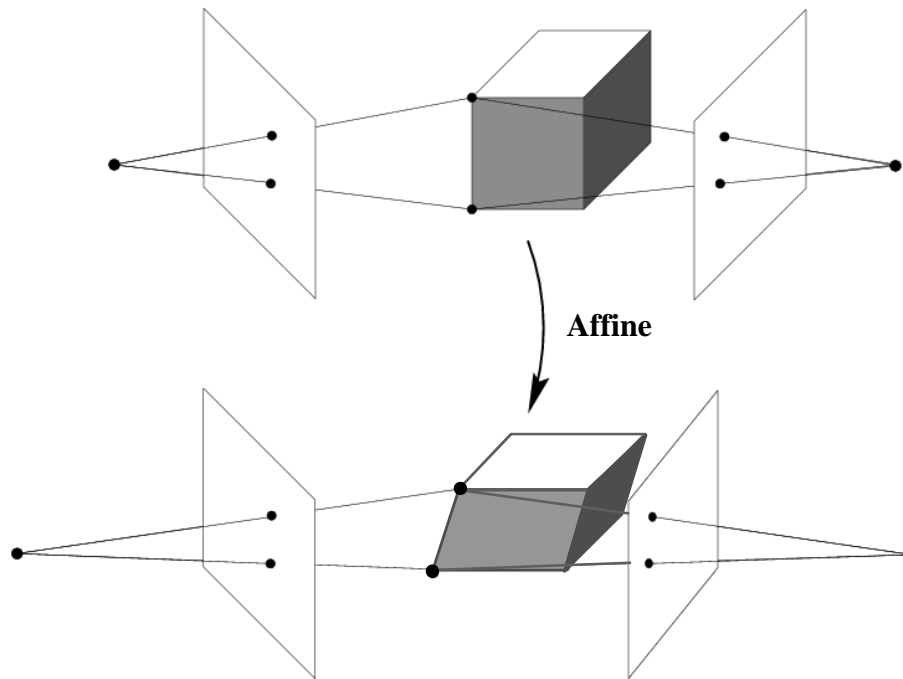

$$\mathbf{x} = \mathbf{P}\mathbf{X} = \left( \mathbf{P}\mathbf{Q}_A^{-1} \right) \left( \mathbf{Q}_A \mathbf{X} \right)$$

# Estimating projection matrices from epipolar constraints

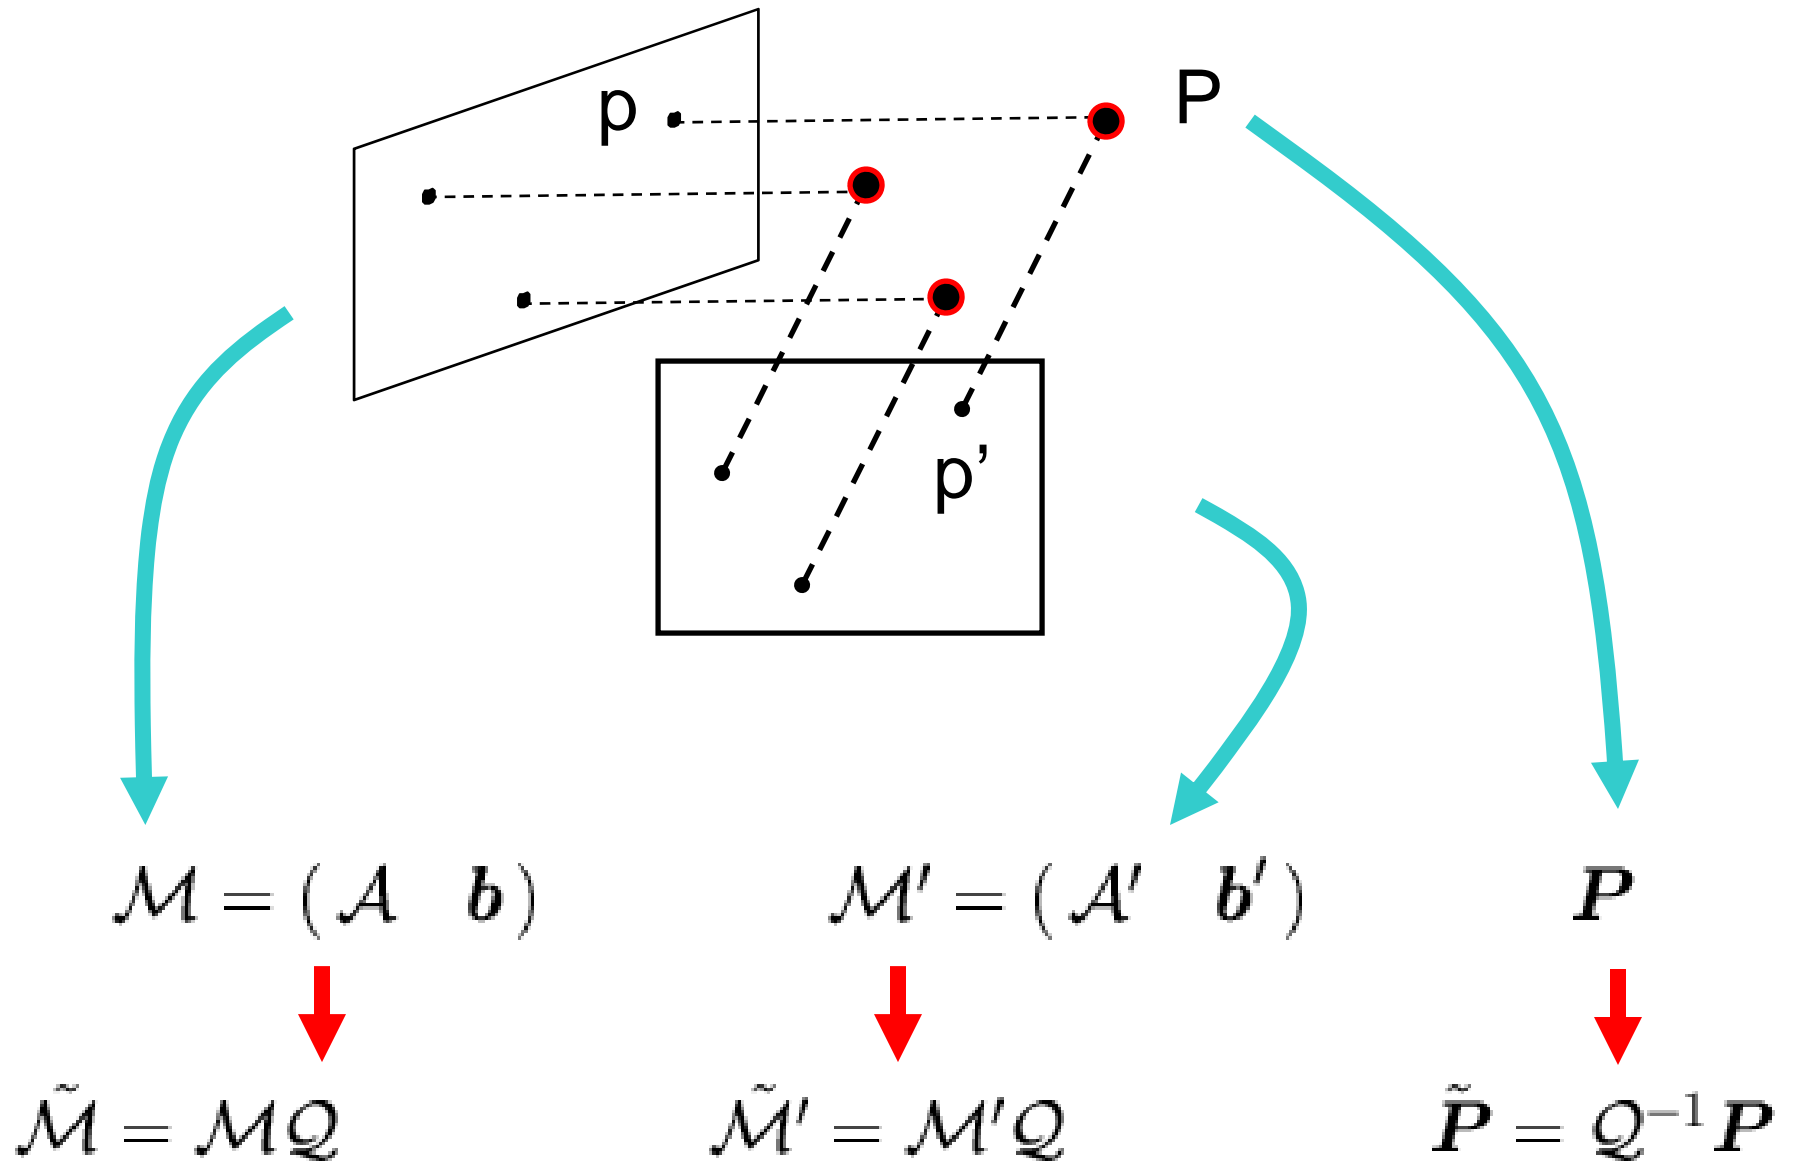

# Estimating projection matrices from epipolar constraints

$$\mathcal{M} = (\mathcal{A} \quad \mathbf{b})$$



$$\tilde{\mathcal{M}} = \mathcal{M}\mathcal{Q}$$

Choose  $\mathcal{Q}$  such that...



$$\tilde{\mathcal{M}} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{pmatrix}$$

$$\mathcal{M}' = (\mathcal{A}' \quad \mathbf{b}')$$



$$\tilde{\mathcal{M}}' = \mathcal{M}'\mathcal{Q}$$



$$\tilde{\mathcal{M}}' = \begin{pmatrix} 0 & 0 & 1 & 0 \\ a & b & c & d \end{pmatrix}$$

$$\mathbf{P}$$



$$\tilde{\mathbf{P}} = \mathcal{Q}^{-1}\mathbf{P}$$



$$\tilde{\mathbf{P}}$$

Canonical affine cameras

$$\tilde{\mathbf{A}} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}$$

$$\tilde{\mathbf{b}} = [0 \quad 0]^T$$

$$\tilde{\mathbf{A}}' = \begin{bmatrix} 0 & 0 & 1 \\ a & b & c \end{bmatrix}$$

$$\tilde{\mathbf{b}}' = [0 \quad d]^T$$

Function of the parameters of  $\mathbf{F}$

# Estimating projection matrices from epipolar constraints

$$\mathcal{M} = (\mathcal{A} \quad \mathbf{b})$$



$$\tilde{\mathcal{M}} = \mathcal{M}\mathcal{Q}$$

Choose  $\mathcal{Q}$  such that...



$$\tilde{\mathcal{M}} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{pmatrix}$$

$$\mathcal{M}' = (\mathcal{A}' \quad \mathbf{b}')$$



$$\tilde{\mathcal{M}}' = \mathcal{M}'\mathcal{Q}$$



$$\tilde{\mathcal{M}}' = \begin{pmatrix} 0 & 0 & 1 & 0 \\ a & b & c & d \end{pmatrix}$$

$$\mathbf{P}$$




$$\tilde{\mathbf{P}} = \mathcal{Q}^{-1}\mathbf{P}$$



$$\tilde{\mathbf{P}}$$

By re-enforcing the epipolar constraint, we can compute  $a, b, c, d$  directly from the measurements

# Reminder: epipolar constraint

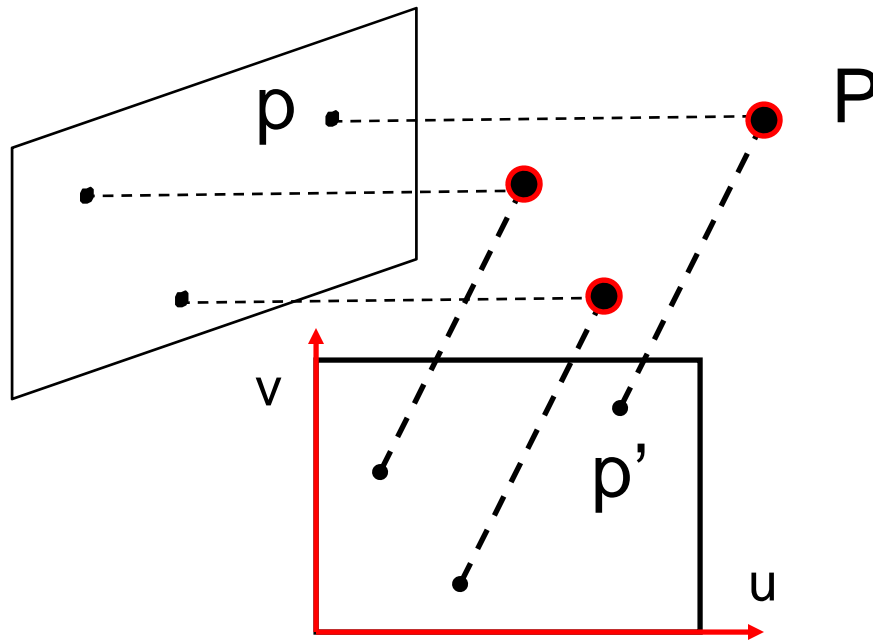

Homogeneous system

$$\begin{cases} \mathbf{p} = \mathcal{A}\mathbf{P} + \mathbf{b} \\ \mathbf{p}' = \mathcal{A}'\mathbf{P} + \mathbf{b}' \end{cases} \quad \Rightarrow \quad \begin{pmatrix} \mathcal{A} & \mathbf{p} - \mathbf{b} \\ \mathcal{A}' & \mathbf{p}' - \mathbf{b}' \end{pmatrix} \begin{pmatrix} \mathbf{P} \\ -1 \end{pmatrix} = \mathbf{0}$$

$$\Rightarrow \boxed{\text{Det} \begin{pmatrix} \mathcal{A} & \mathbf{p} - \mathbf{b} \\ \mathcal{A}' & \mathbf{p}' - \mathbf{b}' \end{pmatrix} = 0} \quad \Rightarrow \quad \alpha u + \beta v + \alpha' u' + \beta' v' + \delta = 0$$

# Estimating projection matrices from epipolar constraints

$$\mathcal{M} = (\mathcal{A} \quad \mathbf{b})$$

$$\mathcal{M}' = (\mathcal{A}' \quad \mathbf{b}')$$

$$P$$



$$\tilde{\mathcal{M}} = \mathcal{M}Q$$

$$\tilde{\mathcal{M}}' = \mathcal{M}'Q$$

$$\tilde{P} = Q^{-1}P$$

Choose Q such that...



$$\tilde{\mathcal{M}} = \left( \begin{array}{ccc|c} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{array} \right)$$

A    b

$$\tilde{\mathcal{M}}' = \left( \begin{array}{ccc|c} 0 & 0 & 1 & 0 \\ a & b & c & d \end{array} \right)$$

$$\tilde{P}$$

Re-enforce the Epipolar constraint

$$\text{Det} \begin{pmatrix} \mathcal{A} & \mathbf{p} - \mathbf{b} \\ \mathcal{A}' & \mathbf{p}' - \mathbf{b}' \end{pmatrix} = 0$$



$$\text{Det} \begin{pmatrix} 1 & 0 & 0 & u \\ 0 & 1 & 0 & v \\ 0 & 0 & 1 & u' \\ a & b & c & v' - d \end{pmatrix} = 0$$

# Estimating projection matrices from epipolar constraints

$$\mathcal{M} = (\mathcal{A} \quad \mathbf{b})$$

$$\mathcal{M}' = (\mathcal{A}' \quad \mathbf{b}')$$

$$P$$



$$\tilde{\mathcal{M}} = \mathcal{M}Q$$

$$\tilde{\mathcal{M}}' = \mathcal{M}'Q$$

$$\tilde{P} = Q^{-1}P$$

Choose Q such that...



$$\tilde{\mathcal{M}} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{pmatrix}$$

$$\tilde{\mathcal{M}}' = \begin{pmatrix} 0 & 0 & 1 & 0 \\ a & b & c & d \end{pmatrix}$$

$$\tilde{P}$$

A    b

$$\text{Det} \begin{pmatrix} 1 & 0 & 0 & u \\ 0 & 1 & 0 & v \\ 0 & 0 & 1 & u' \\ a & b & c & v' - d \end{pmatrix} = au - bv + cu' + v' - d = 0$$



# Estimating projection matrices from epipolar constraints

$$\text{Det} \begin{pmatrix} 1 & 0 & 0 & u \\ 0 & 1 & 0 & v \\ 0 & 0 & 1 & u' \\ a & b & c & v' - d \end{pmatrix} = au - bv + cu' + v' - d = 0$$

- Linear relationship between measurements and unknown

Unknown:  $a, b, c, d$

Measurements:  $u, u', v, v'$

- From at least 4 correspondences, we can solve this linear system and **compute  $a, b, c, d$**  (via least square)
- The cameras can be computed
- How about the structure?

# Estimating the structure from epipolar constraints

$$\tilde{\mathcal{M}} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \end{pmatrix} \quad \tilde{\mathcal{M}}' = \begin{pmatrix} 0 & 0 & 1 & 0 \\ a & b & c & d \end{pmatrix} \quad \tilde{\mathbf{P}}$$

A    b

$$\begin{pmatrix} \mathcal{A} & \mathbf{p} - \mathbf{b} \\ \mathcal{A}' & \mathbf{p}' - \mathbf{b}' \end{pmatrix} \begin{pmatrix} \mathbf{P} \\ -1 \end{pmatrix} = \mathbf{0} \quad \rightarrow$$

$$\begin{pmatrix} 1 & 0 & 0 & u \\ 0 & 1 & 0 & v \\ 0 & 0 & 1 & u' \\ a & b & c & v' - d \end{pmatrix} \begin{pmatrix} \tilde{\mathbf{P}} \\ -1 \end{pmatrix} = \mathbf{0} \quad \rightarrow \quad \tilde{\mathbf{P}} = \begin{pmatrix} u \\ v \\ u' \end{pmatrix}$$

Can be solved by least square again

# A factorization method – Tomasi & Kanade algorithm

C. Tomasi and T. Kanade. [Shape and motion from image streams under orthography: A factorization method.](#) *IJCV*, 9(2):137-154, November 1992.

- Centering the data
- Factorization

# A factorization method - Centering the data

Centering: subtract the centroid of the image points

$$\hat{\mathbf{x}}_{ij} = \mathbf{x}_{ij} - \frac{1}{n} \sum_{k=1}^n \mathbf{x}_{ik}$$

# A factorization method - Centering the data

Centering: subtract the centroid of the image points

$$\hat{\mathbf{x}}_{ij} = \mathbf{x}_{ij} - \frac{1}{n} \sum_{k=1}^n \mathbf{x}_{ik} = \mathbf{A}_i \mathbf{X}_j + \mathbf{b}_i - \frac{1}{n} \sum_{k=1}^n (\mathbf{A}_i \mathbf{X}_k + \mathbf{b}_i)$$

# A factorization method - Centering the data

Centering: subtract the centroid of the image points


$$\begin{aligned}\hat{\mathbf{x}}_{ij} &= \mathbf{x}_{ij} - \frac{1}{n} \sum_{k=1}^n \mathbf{x}_{ik} = \mathbf{A}_i \mathbf{X}_j + \mathbf{b}_i - \frac{1}{n} \sum_{k=1}^n (\mathbf{A}_i \mathbf{X}_k + \mathbf{b}_i) \\ &= \mathbf{A}_i \left( \mathbf{X}_j - \frac{1}{n} \sum_{k=1}^n \mathbf{X}_k \right) = \mathbf{A}_i \hat{\mathbf{X}}_j\end{aligned}$$

Assume that the origin of the world coordinate system is at the centroid of the 3D points

After centering, each normalized point  $\mathbf{x}_{ij}$  is related to the 3D point  $\mathbf{X}_j$  by

$$\hat{\mathbf{x}}_{ij} = \mathbf{A}_i \mathbf{X}_j$$

# A factorization method - Centering the data

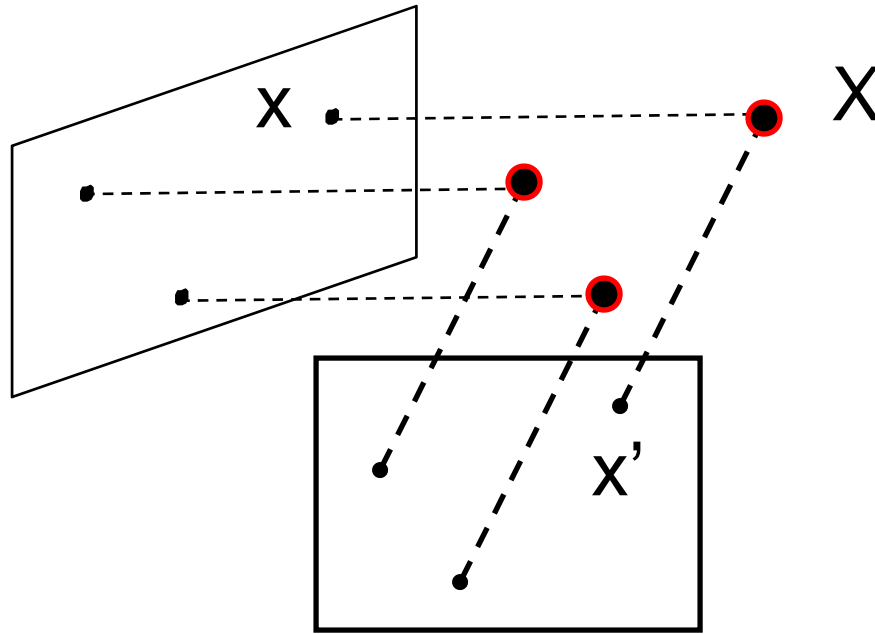

$$\hat{\mathbf{X}}_{ij} = \mathbf{A}_i \mathbf{X}_j$$

# A factorization method - factorization

Let's create a  $2m \times n$  data (measurement) matrix:

$$\mathbf{D} = \begin{bmatrix} \hat{\mathbf{x}}_{11} & \hat{\mathbf{x}}_{12} & \cdots & \hat{\mathbf{x}}_{1n} \\ \hat{\mathbf{x}}_{21} & \hat{\mathbf{x}}_{22} & \cdots & \hat{\mathbf{x}}_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ \hat{\mathbf{x}}_{m1} & \hat{\mathbf{x}}_{m2} & \cdots & \hat{\mathbf{x}}_{mn} \end{bmatrix}$$

↓ cameras (2m)

→ points (n)



# A factorization method - factorization

Let's create a  $2m \times n$  data (measurement) matrix:


$$\mathbf{D} = \begin{bmatrix} \hat{\mathbf{x}}_{11} & \hat{\mathbf{x}}_{12} & \cdots & \hat{\mathbf{x}}_{1n} \\ \hat{\mathbf{x}}_{21} & \hat{\mathbf{x}}_{22} & \cdots & \hat{\mathbf{x}}_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ \hat{\mathbf{x}}_{m1} & \hat{\mathbf{x}}_{m2} & \cdots & \hat{\mathbf{x}}_{mn} \end{bmatrix} = \begin{bmatrix} \mathbf{A}_1 \\ \mathbf{A}_2 \\ \vdots \\ \mathbf{A}_m \end{bmatrix} \begin{bmatrix} \mathbf{X}_1 & \mathbf{X}_2 & \cdots & \mathbf{X}_n \end{bmatrix}$$

$(2m \times n)$  cameras  $(2m \times 3)$  points  $(3 \times n)$

M S


The measurement matrix  $\mathbf{D} = \mathbf{M} \mathbf{S}$  must have rank 3  
(it's a product of a  $2m \times 3$  matrix and  $3 \times n$  matrix)

# Factorizing the measurement matrix

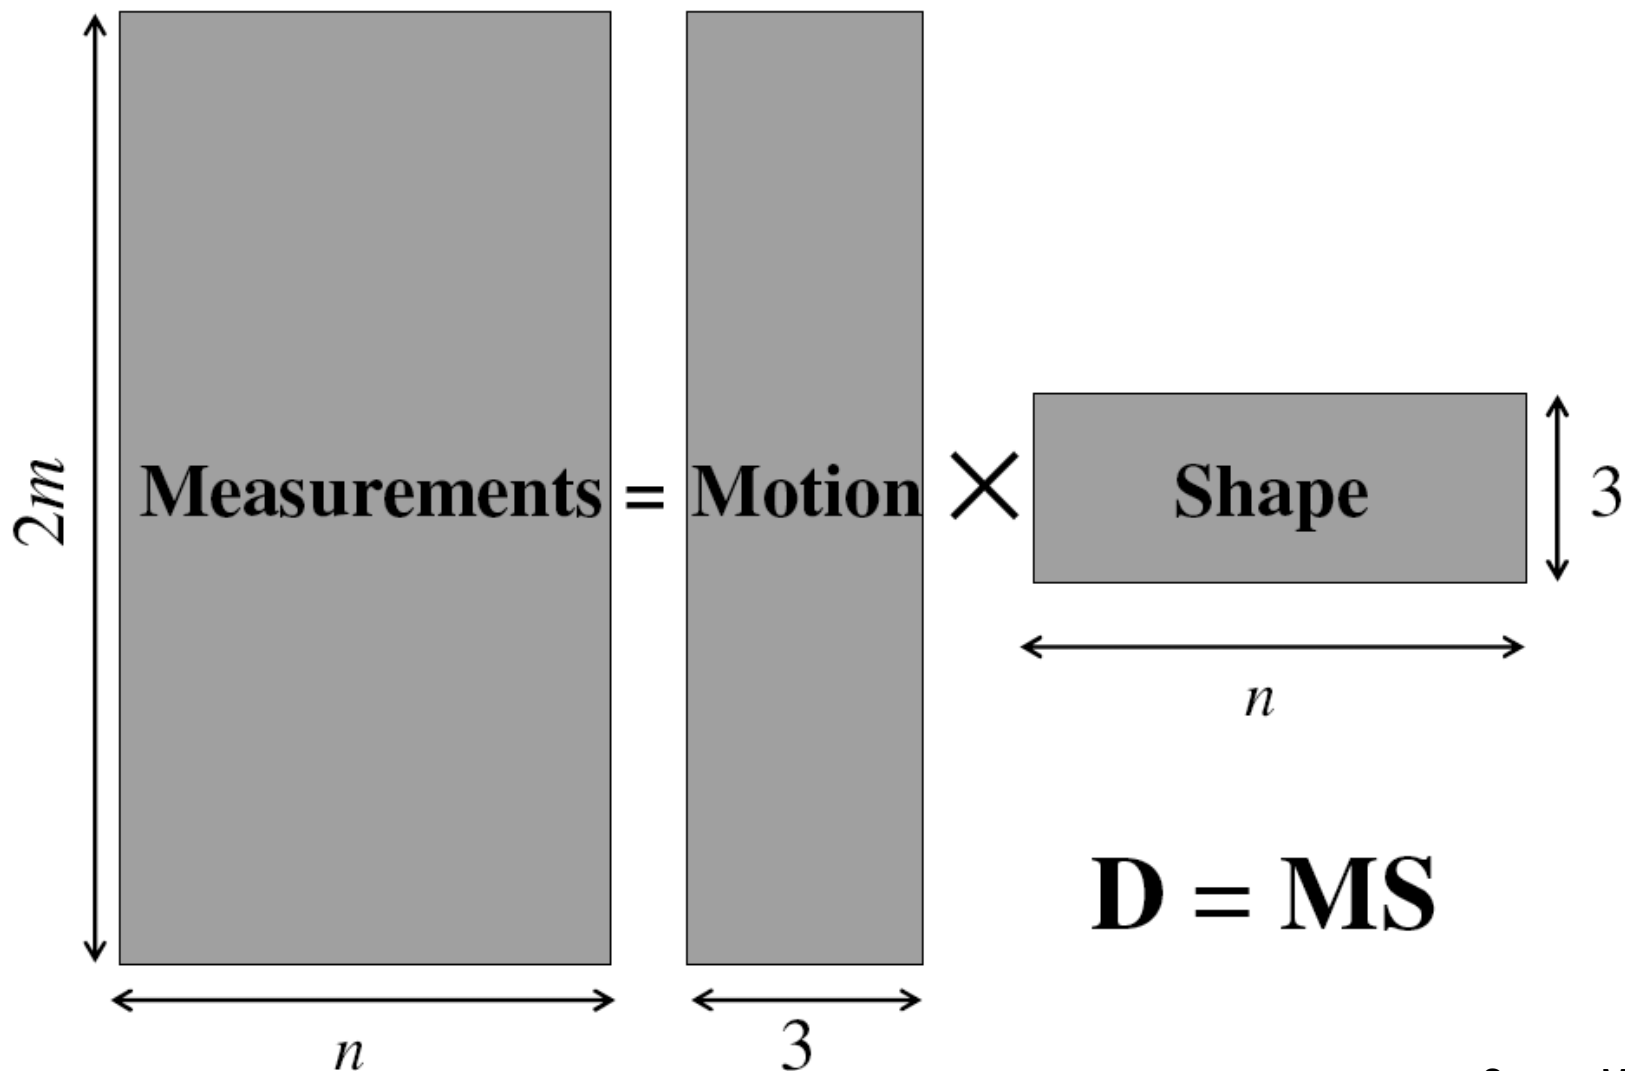


# Factorizing the measurement matrix

Singular value decomposition of  $D$ :

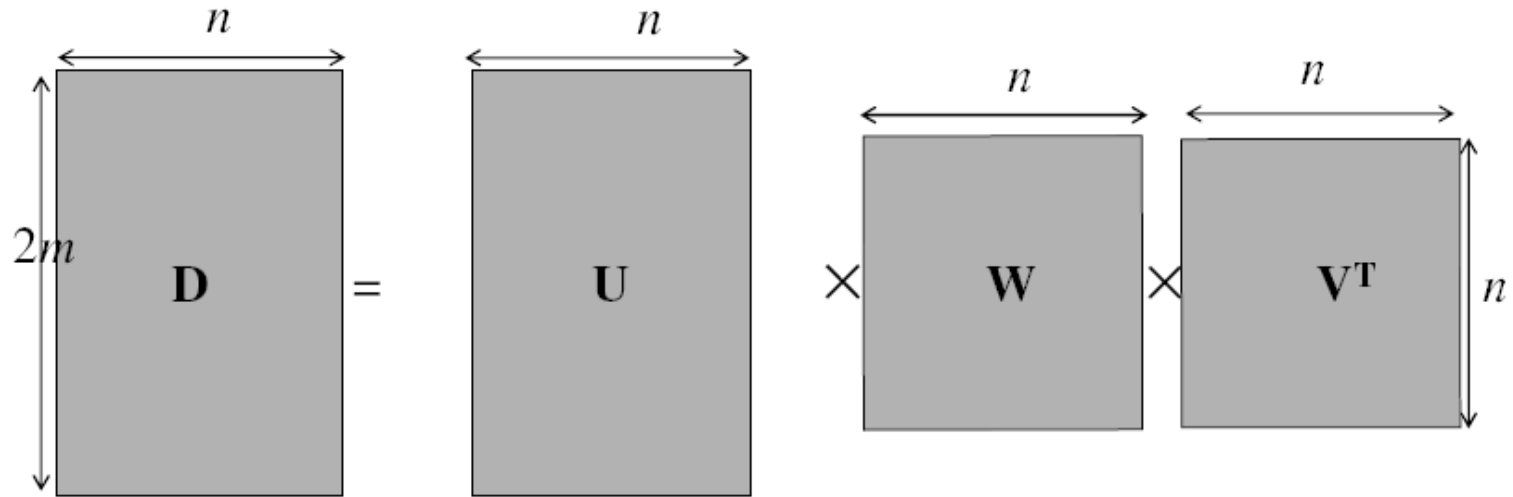


# Factorizing the measurement matrix

Singular value decomposition of  $D$ :

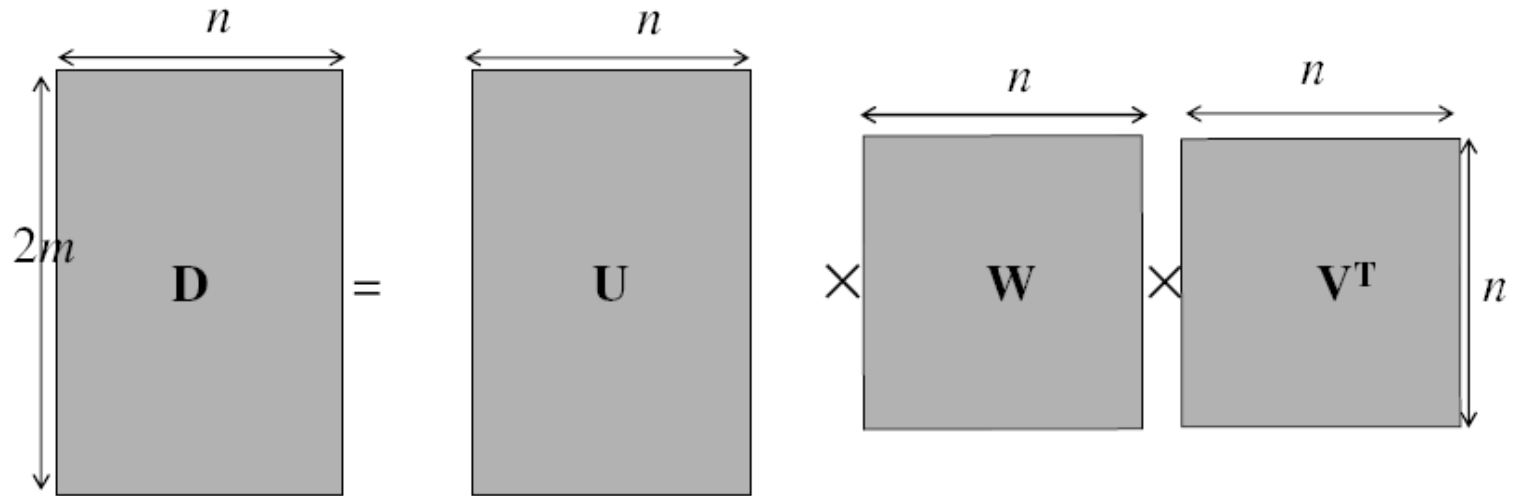


Since  $\text{rank}(D)=3$ , there are only 3 non-zero singular values

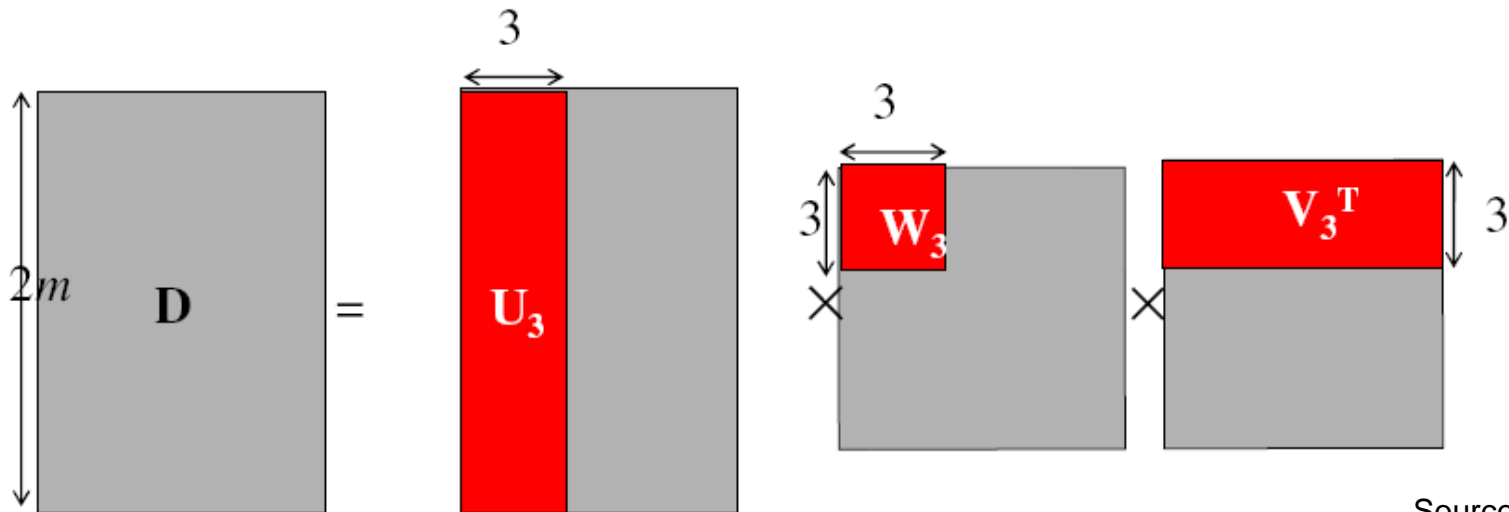

# Factorizing the measurement matrix

Obtaining a factorization from SVD:

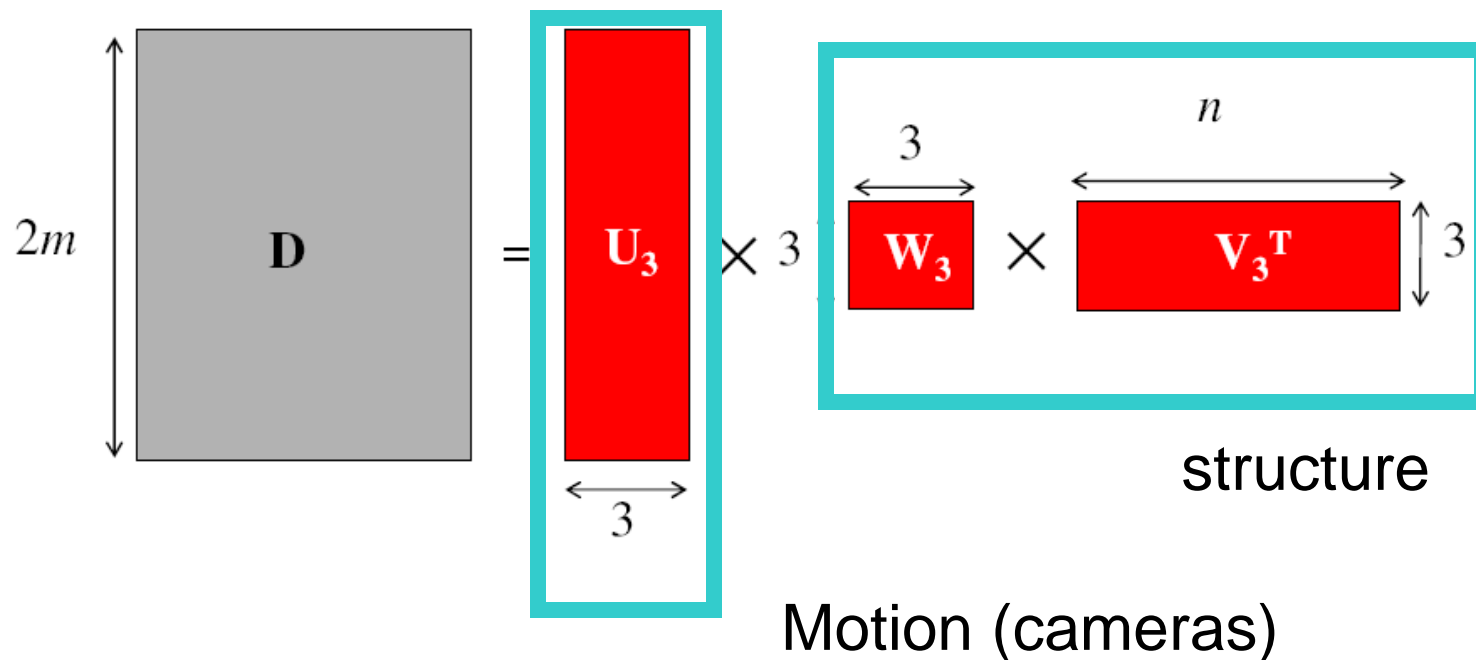


What is the issue here?

$D$  has rank  $> 3$  because of

- measurement noise
- affine approximation

# Factorizing the measurement matrix

Obtaining a factorization from SVD:

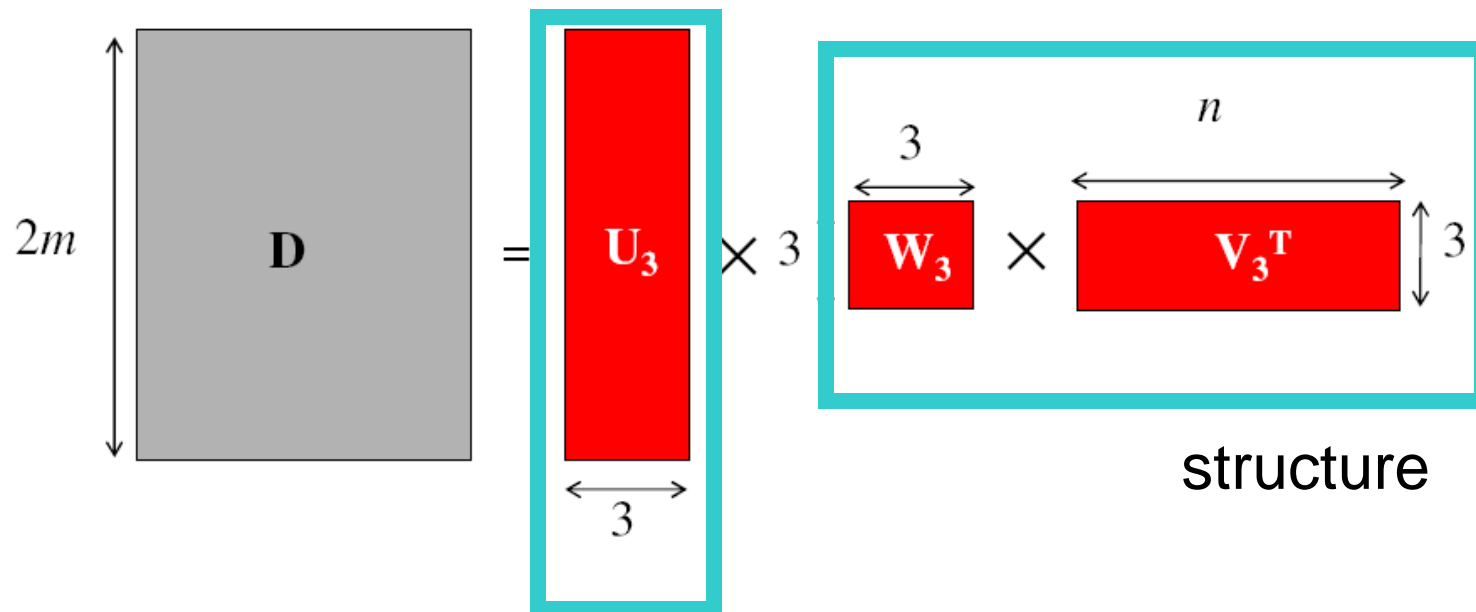


**Theorem:** When  $D$  has a rank greater than  $p$ ,  $U_p W_p V_p^T$  is the best possible rank- $p$  approximation of  $D$  in the sense of the Frobenius norm.

$$D = U_3 W_3 V_3^T$$

$$\begin{cases} \mathcal{A}_0 = U_3 \\ \mathcal{P}_0 = W_3 V_3^T \end{cases}$$

# Affine ambiguity

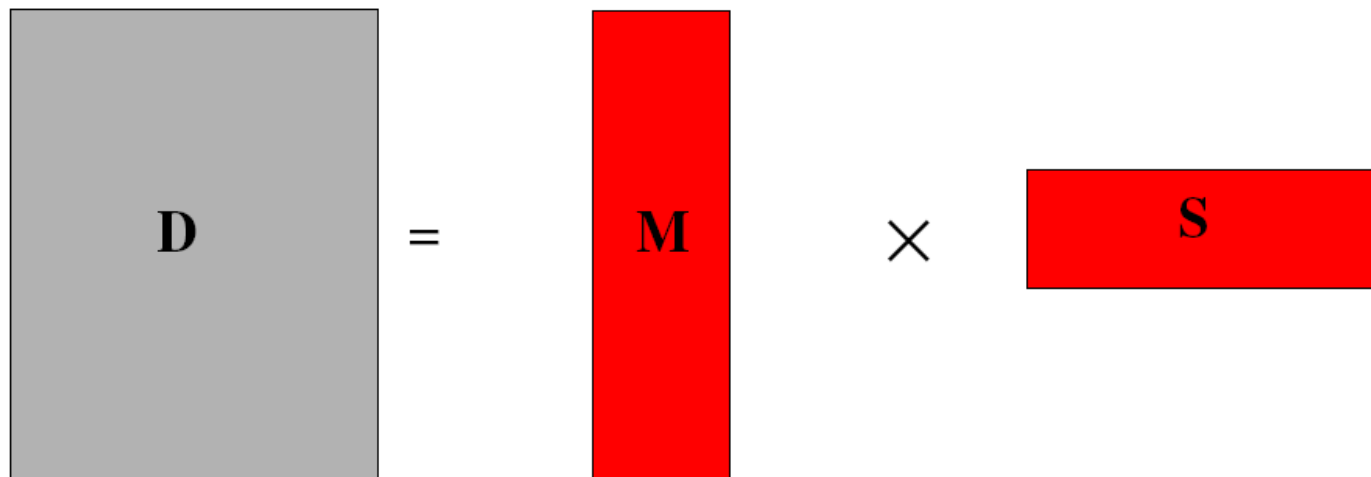

The diagram illustrates the equation  $\mathbf{D} = \mathbf{M} \times \mathbf{S}$ . On the left is a gray square labeled  $\mathbf{D}$ . To its right is an equals sign. Further right is a tall red vertical rectangle labeled  $\mathbf{M}$ . To its right is a multiplication symbol  $\times$ . To the right of the multiplication symbol is a wide red horizontal rectangle labeled  $\mathbf{S}$ .

The decomposition is not unique. We get the same  $\mathbf{D}$  by using any  $3 \times 3$  matrix  $\mathbf{C}$  and applying the transformations  $\mathbf{M} \rightarrow \mathbf{MC}$ ,  $\mathbf{S} \rightarrow \mathbf{C}^{-1}\mathbf{S}$

We can enforce some Euclidean constraints to resolve the ambiguity (more on next lecture!)

# Algorithm summary

Given:  $m$  images and  $n$  features  $\mathbf{x}_{ij}$

For each image  $i$ , center the feature coordinates

Construct a  $2m \times n$  measurement matrix  $\mathbf{D}$ :

- Column  $j$  contains the projection of point  $j$  in all views
- Row  $i$  contains one coordinate of the projections of all the  $n$  points in image  $i$

Factorize  $\mathbf{D}$ :

- Compute SVD:  $\mathbf{D} = \mathbf{U} \mathbf{W} \mathbf{V}^T$
- Create  $\mathbf{U}_3$  by taking the first 3 columns of  $\mathbf{U}$
- Create  $\mathbf{V}_3$  by taking the first 3 columns of  $\mathbf{V}$
- Create  $\mathbf{W}_3$  by taking the upper left  $3 \times 3$  block of  $\mathbf{W}$

Create the motion and shape matrices:

- $\mathbf{M} = \mathbf{U}_3 \mathbf{W}_3^{1/2}$  and  $\mathbf{S} = \mathbf{W}_3^{1/2} \mathbf{V}_3^T$  (or  $\mathbf{M} = \mathbf{U}_3$  and  $\mathbf{S} = \mathbf{W}_3 \mathbf{V}_3^T$ )

Eliminate affine ambiguity



# Reconstruction results



1





60



120



150

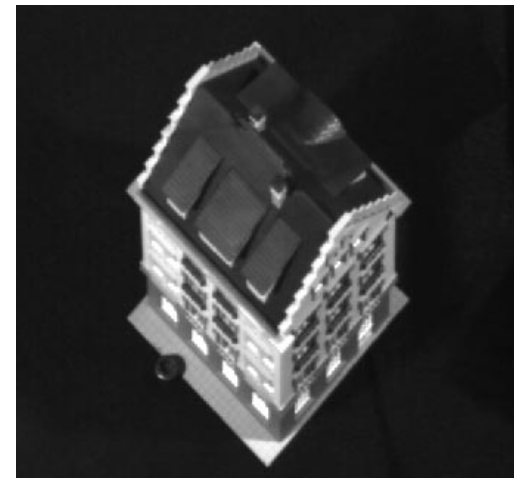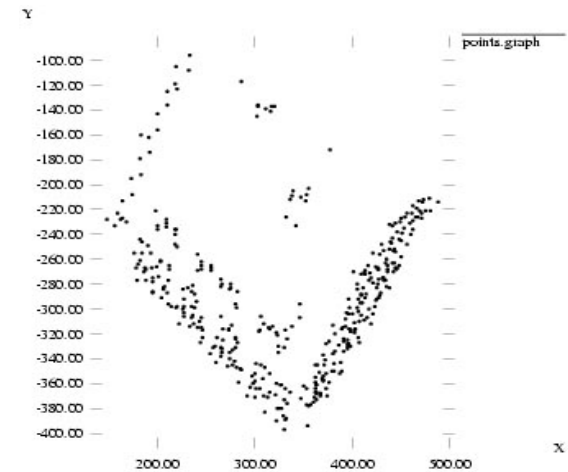

Next lecture

Multiple view geometry

Perspective structure from Motion