

CHECKERBOARD NIGHTMARE by Kristofer Straub

CHEX DEMYSTIFIES THE NEW
MARKETING TERMINOLOGY!

VIRAL PRO-MARKETIVITY:
A "WET STANDARDIZED" CONSUMER
TASTE SPACE RESOLVER EMPOWERED
BY C2C LATCHKEY SOLVABLES.
GENERATIVELY E-CYCLIC.



**E-CYCLIC LATCHKEY
SOLVABLES:** BOTTOM-UP HOLISTIC
METHODOLOGICAL APPROACH FOR
INTEGRATING "SOFT PYRAMID"
VISION SPACE AND PUNCTUATED
LIFECYCLE DEVELOPMENT IN
REAL-TIME.



**"SOFT PYRAMID" VISION
SPACE:** BRACKETED MODEL DYNAMIC
THAT CONCEPTUALIZES KEY E-MOBILITY
DOVETAILING. ACTUATES VIRALLY
PRO-MARKETIVE 828 INTER-
STRUCTURALIZATION.



AND KNOWING
IS HALF THE
BATTLE.



Second-Order Type Systems

One-Slide Summary

- A **polymorphic** type system is flexible: it allows one functions to be applied to **many** types of arguments.
- Parametric **impredicative** polymorphism allows **any** type to be used polymorphically. This has simple syntax but complicated expressive semantics and type reconstruction is undecidable.
- Parametric **predicative** polymorphism allows only **monomorphic** types as type variables.
- **Prenex** predicative polymorphism and the **value restriction** are two constrained, weaker versions of predicative polymorphism that are used in practice.

Upcoming Lectures

- We're now reaching the point where you have all of the tools and background to understand advanced topics.
- Upcoming Topics:
 - Dependent Types + Data Abstraction
 - Communication and Concurrency
 - Neurosymbolic Analyses
 - Automated Program Repair



Modeling References

- A heap is a mapping from addresses to values

$$h ::= \cdot \mid h, a \leftarrow v : \tau$$

- $a \in \text{Addresses}$ (Addresses $\neq \mathbb{Z}$?)
- We tag the heap cells with their types
- Types are useful only for static semantics. They are not needed for the evaluation \Rightarrow are not a part of the implementation
- We call a program an expression with a heap
$$p ::= \text{heap } h \text{ in } e$$
 - The initial program is “heap \cdot in e ”
 - Heap addresses act as bound variables in the expression
 - This is a trick that allows easy *reuse of properties of local variables for heap addresses*
 - e.g., we can rename the address and its occurrences at will

Static Semantics of References

- Typing rules for expressions:

$$\frac{\Gamma \vdash e : \tau}{\Gamma \vdash (\text{ref } e : \tau) : \tau \text{ ref}} \qquad \frac{\Gamma \vdash e : \tau \text{ ref}}{\Gamma \vdash !e : \tau}$$

$$\frac{\Gamma \vdash e_1 : \tau \text{ ref} \quad \Gamma \vdash e_2 : \tau}{\Gamma \vdash e_1 := e_2 : \text{unit}}$$

- and for programs

$$\frac{\Gamma \vdash v_i : \tau_i \ (i = 1 \dots n) \quad \Gamma \vdash e : \tau}{\vdash \text{heap } h \text{ in } e : \tau}$$

where $\Gamma = a_1 : \tau_1 \text{ ref}, \dots, a_n : \tau_n \text{ ref}$

and $h = a_1 \leftarrow v_1 : \tau_1, \dots, a_n \leftarrow v_n : \tau_n$

Contextual Semantics for References

- Addresses are values: $v ::= \dots \mid a$
- New contexts: $H ::= \text{ref } H \mid H_1 := e_2 \mid a_1 := H_2 \mid ! H$
- No new *local* reduction rules
- But some *new global* reduction rules
 - $\text{heap } h \text{ in } H[\text{ref } v : \tau] \rightarrow \text{heap } h, a \leftarrow v : \tau \text{ in } H[a]$
 - where a is fresh (this models *allocation* - the heap is extended)
 - $\text{heap } h \text{ in } H[! a] \rightarrow \text{heap } h \text{ in } H[v]$
 - where $a \leftarrow v : \tau \in h$ (heap lookup - can we get stuck?)
 - $\text{heap } h \text{ in } H[a := v] \rightarrow \text{heap } h[a \leftarrow v] \text{ in } H[*]$
 - where $h[a \leftarrow v]$ means a heap like h except that the part “ $a \leftarrow v_1 : \tau$ ” in h is replaced by “ $a \leftarrow v : \tau$ ” (memory update)
- Global rules are used to *propagate the effects of a write* to the entire program (eval order matters!)

Example with References

- Consider these (the redex is underlined)
 - heap · in $(\lambda f:\text{int} \rightarrow \text{int ref. } !(f\ 5))$ $(\lambda x:\text{int. ref } x : \text{int})$
 - heap · in $!((\lambda x:\text{int. ref } x : \text{int})\ 5)$
 - heap · in $!(\text{ref } 5 : \text{int})$
 - heap a = 5 : int in !a
 - heap a = 5 : int in 5
- The resulting program has a **useless memory cell**
- An equivalent result would be
heap · in 5
- This is a simple way to model **garbage collection**

The Limitations of F_1

- In F_1 a function works **exactly for one type**
- Example: the identity function
 - $\text{id} = \lambda x:\tau. x : \tau \rightarrow \tau$
 - We need to write *one version for each type*
 - Worse: $\text{sort} : (\tau \rightarrow \tau \rightarrow \text{bool}) \rightarrow \tau \text{ array} \rightarrow \tau \text{ array}$
- The various sorting functions differ only in typing
 - At runtime they *perform exactly the same operations*
 - Different versions only placate the type checker
- Two alternatives:
 - Circumvent the type system (see C, Java, ...), or
 - Use a *more flexible type system* that lets us write only one sorting function (but use it on many types of objs)

Cunning Plan

- Introduce **Polymorphism** (much vocab)
- It's Strong: Encode Stuff
- It's Too Strong: Restrict
 - Still too strong ... restrict more
- Final Answer:
 - Polymorphism works “as expect”
 - All the good stuff is handled
 - No tricky decideability problems
- Small slide count, mostly concepts

Polymorphism

- Informal definition

A function is polymorphic if it can be applied to “*many*” types of arguments

- Various kinds of polymorphism depending on the definition of “*many*”

- subtype polymorphism (aka bounded polymorphism)
 - “many” = all subtypes of a given type
- ad-hoc polymorphism
 - “many” = depends on the function
 - choose behavior at runtime (depending on types, e.g. sizeof)
- parametric *predicative* polymorphism
 - “many” = all monomorphic types
- parametric *impredicative* polymorphism
 - “many” = all types

Parametric Polymorphism:

Types as Parameters

- We introduce type variables and allow expressions to have variable types
- We introduce polymorphic types

$\tau ::= b \mid \tau_1 \rightarrow \tau_2 \mid \mathbf{t} \mid \forall \mathbf{t}. \tau$

$e ::= x \mid \lambda x:\tau. e \mid e_1 e_2 \mid \Lambda \mathbf{t}. e \mid e[\tau]$

$\Lambda = \text{Lambda}$



- $\Lambda \mathbf{t}. e$ is **type abstraction** (or generalization, “for all t ”)
- $e[\tau]$ is **type application** (or instantiation)
- Examples:
 - $\text{id} = \Lambda t. \lambda x:t. x$: $\forall t. t \rightarrow t$
 - $\text{id}[\text{int}] = \lambda x:\text{int}. x$: $\text{int} \rightarrow \text{int}$
 - $\text{id}[\text{bool}] = \lambda x:\text{bool}. x$: $\text{bool} \rightarrow \text{bool}$
 - “id 5” is invalid. Write “id[int] 5” instead!

Impredicative Typing Rules

- The **typing rules**:

$$\frac{x : \tau \text{ in } \Gamma}{\Gamma \vdash x : \tau} \qquad \frac{\Gamma, x : \tau \vdash e : \tau'}{\Gamma \vdash \lambda x : \tau. e : \tau \rightarrow \tau'}$$

$$\frac{\Gamma \vdash e_1 : \tau \rightarrow \tau' \quad \Gamma \vdash e_2 : \tau}{\Gamma \vdash e_1 e_2 : \tau'}$$

$$\frac{\Gamma \vdash e : \tau}{\Gamma \vdash \Lambda t. e : \forall t. \tau} \quad t \text{ does not occur in } \Gamma$$

$$\frac{\Gamma \vdash e : \forall t. \tau'}{\Gamma \vdash e[\tau] : [\tau/t]\tau'}$$

Impredicative Polymorphism

- Verify that “id[int] 5” has type int
- Note the **side-condition** in the rule for type abstraction
 - Prevents ill-formed terms like: $\lambda x:t. \Lambda t. x$
- The evaluation rules are just like those of F_1
 - This means that type abstraction and application are all performed at compile time (*no run-time cost*)
 - We do not evaluate under Λ ($\Lambda t. e$ is a value)
 - We do not have to operate on types at run-time
 - This is called **phase separation**: type checking is separate from execution

(Aside:) Parametricity or “Theorems for Free” (P. Wadler)

- Can prove properties of a term *just from its type*
- There is **only one value** of type $\forall t. t \rightarrow t$
 - The identity function
- There is **no value** of type $\forall t. t$
- Take the function **reverse** : $\forall t. t \text{ List} \rightarrow t \text{ List}$
 - This function **cannot inspect** the elements of the list
 - It can only return a list of “original list elements”
 - If L_1 and L_2 have the same length and let “**match**” be a function that compares two lists element-wise according to an arbitrary predicate
 - then “**match** L_1 L_2 ” \Rightarrow “**match** (reverse L_1) (reverse L_2)” !

Expressiveness of Impredicative Polymorphism

- This calculus is called
 - F_2
 - system F
 - second-order λ -calculus
 - polymorphic λ -calculus
- Polymorphism is *extremely expressive*
- We can encode many base and structured types in F_2

Encoding Base Types in F_2

- **Booleans**

- $\text{bool} = \forall t. t \rightarrow t \rightarrow t$ (*given any two things, select one*)
- There are **exactly two values** of this type!
- $\text{true} = \Lambda t. \lambda x:t. \lambda y:t. x$
- $\text{false} = \Lambda t. \lambda x:t. \lambda y:t. y$
- $\text{not} = \lambda b:\text{bool}. \Lambda t. \lambda x:t. \lambda y:t. b [t] y x$


- **Naturals**

- $\text{nat} = \forall t. (t \rightarrow t) \rightarrow t \rightarrow t$ (*given a successor and a zero element, compute a natural number*)
- $0 = \Lambda t. \lambda s:t \rightarrow t. \lambda z:t. z$
- $n = \Lambda t. \lambda s:t \rightarrow t. \lambda z:t. s (s (s \dots s(n)))$
- $\text{add} = \lambda n:\text{nat}. \lambda m:\text{nat}. \Lambda t. \lambda s:t \rightarrow t. \lambda z:t. n [t] s (m [t] s z)$
- $\text{mul} = \lambda n:\text{nat}. \lambda m:\text{nat}. \Lambda t. \lambda s:t \rightarrow t. \lambda z:t. n [t] (m [t] s) z$

Expressiveness of F_2

- We can encode similarly:
 - $\tau_1 + \tau_2$ as $\forall t. (\tau_1 \rightarrow t) \rightarrow (\tau_2 \rightarrow t) \rightarrow t$
 - $\tau_1 \times \tau_2$ as $\forall t. (\tau_1 \rightarrow \tau_2 \rightarrow t) \rightarrow t$
 - **unit** as $\forall t. t \rightarrow t$
- We *cannot encode full recursion* (next lecture: $\mu t. \tau$)
 - We can encode **primitive recursion** but *not full recursion*
 - All terms in F_2 have a **termination proof** in second-order Peano arithmetic (Girard, 1971)
 - This is the set of naturals defined using zero, successor, induction along with quantification both over naturals and over sets of naturals

THE NO. 1 SURFING GROUP IN THE COUNTRY **THE BEACH BOYS**
SURFIN' U.S.A. *adidas*



SURFIN' U.S.A. - FAME'S DAUGHTER - WIGWAG - LOWEY - SEA - SHUT DOWN
WAKE - JAWZ - WAKIT - TOM - LANA - LET'S GO TOPPIN' - FINEST KESTLES

- This American Turing-award winner is known as the DARPA program manager in charge of funding groups developing TCP/IP. He funded and founded ICANN and the Internet Society. He helped develop the first commercial email system connected to the internet.

Computer Science, Mathematics

- This American mathematician did not win the Turing award, but developed in 1936, independently of Alan Turing, a model of computation that was equivalent to Turing Machines. The unsolvability of the *Entscheidungsproblem* was exactly what was needed to obtain unsolvability results in the theory of formal languages.



Logic in Prose

148. Except living with others our whole life, we are both alone, solitary.
211. It was an uncomfortable silence. It was as if they were both at ease with each other.
222. He is just as powerful as myself, but not equally so.
270. He probably does know me but he wears a mask, so illogically he could be a number of people that I know.
426. Though her grades proved otherwise, Maeby wasn't an idiot.

Q: Books (702 / 842)

- This 1953 dystopian novel by Ray Bradbury has censorship as a major theme. The main character, Guy Montag, is a fireman.

What's Wrong with F_2



- Simple syntax but **very complicated semantics**
 - **id** can be applied to itself: “**id** [$\forall t. t \rightarrow t$] **id**”
 - This can lead to paradoxical situations in a pure set-theoretic interpretation of types
 - e.g., the meaning of **id** is a function whose domain contains a set (the meaning of $\forall t. t \rightarrow t$) that contains **id**!
 - This suggests that **giving an interpretation** to impredicative type abstraction is tricky
- Complicated termination proof (Girard)
- Type reconstruction (typeability) is **undecidable**
 - If the type application and abstraction are missing
- How to fix it?
 - **Restrict the use of polymorphism**

Predicative Polymorphism

- Restriction: type variables can be instantiated *only with monomorphic types*
- This restriction can be expressed syntactically
 - $\tau ::= b \mid \tau_1 \rightarrow \tau_2 \mid t$ // monomorphic types
 - $\sigma ::= \tau \mid \forall t. \sigma \mid \sigma_1 \rightarrow \sigma_2$ // polymorphic types
 - $e ::= x \mid e_1 e_2 \mid \lambda x:\sigma. e \mid \Lambda t. e \mid e [\tau]$
 - Type application is restricted to *mono types*
 - Cannot apply “*id*” to itself anymore
- Same great typing rules
- Simple semantics and termination proof

Was that good enough?

- Type reconstruction still **undecidable**
- Must. Restrict. Further!

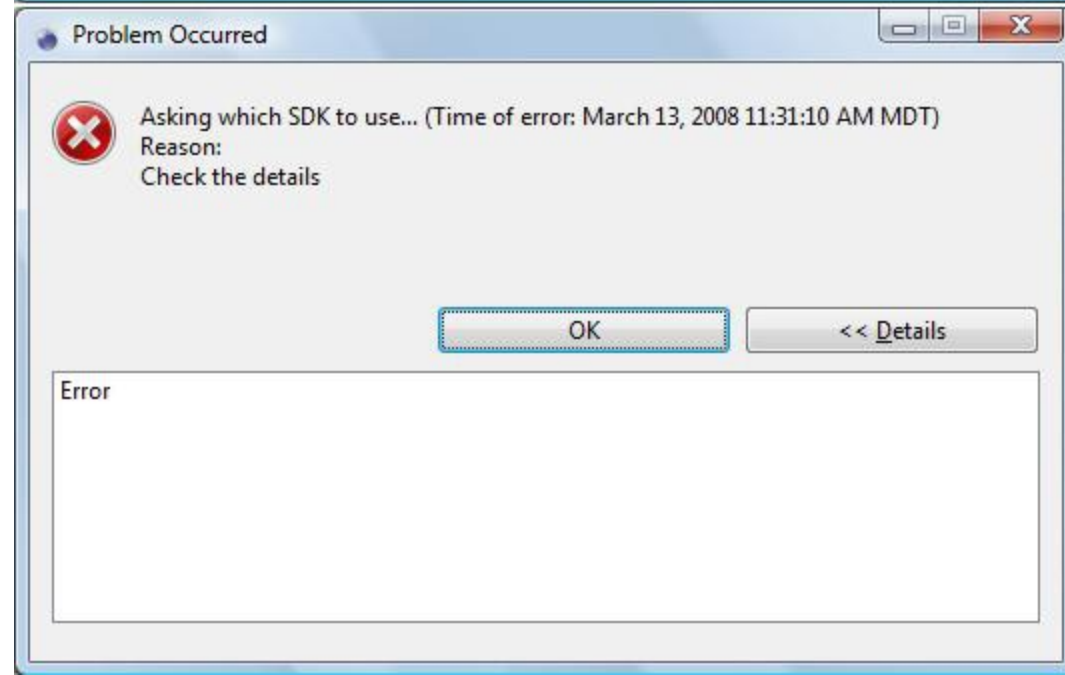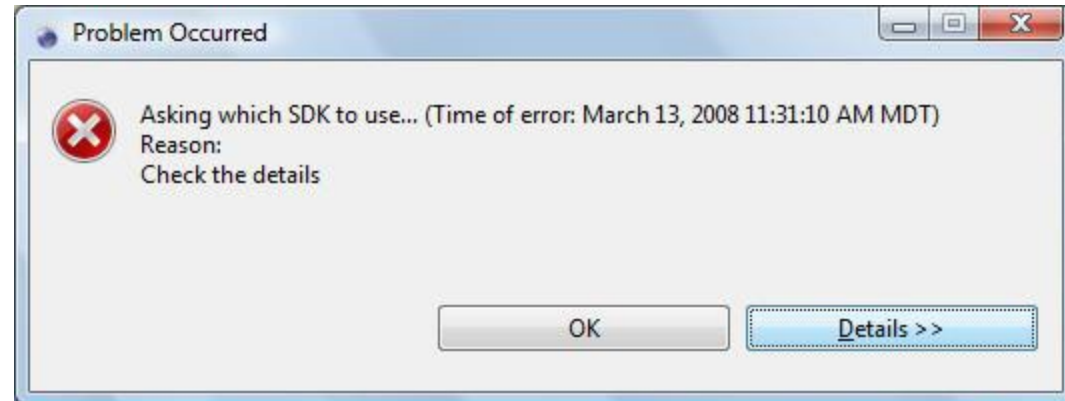


Prenex Predicative Polymorphism

- Restriction: polymorphic type constructor at *top level only*
- This restriction can also be expressed syntactically
$$\tau ::= b \mid \tau_1 \rightarrow \tau_2 \mid t$$
$$\sigma ::= \tau \mid \forall t. \sigma$$
$$e ::= x \mid e_1 e_2 \mid \lambda x:\tau. e \mid \Lambda t. e \mid \mathbf{e} [\tau]$$
 - Type application is predicative
 - Abstraction only on mono types
 - The only occurrences of \forall are at the top level of a type
$$(\forall t. t \rightarrow t) \rightarrow (\forall t. t \rightarrow t) \quad \text{is not a valid type}$$
- Same typing rules, simple semantics and termination proof, *decidable type inference!*
- Thought question: What's wrong/missing here?

Expressiveness of Prenex Predicative F_2

- We have simplified **too much!**
- Not expressive enough to encode nat, bool
 - But such encodings are only of **theoretical interest** anyway (cf. time wasting)
- Is it expressive enough in practice? Almost!
 - Cannot write something like
$$(\lambda s:\forall t.\tau. \dots s \text{ [nat] } x \dots s \text{ [bool] } y)$$
$$(\Lambda t. \dots \text{code for sort})$$
 - Formal argument **s cannot be polymorphic**

What are we trying to do again?

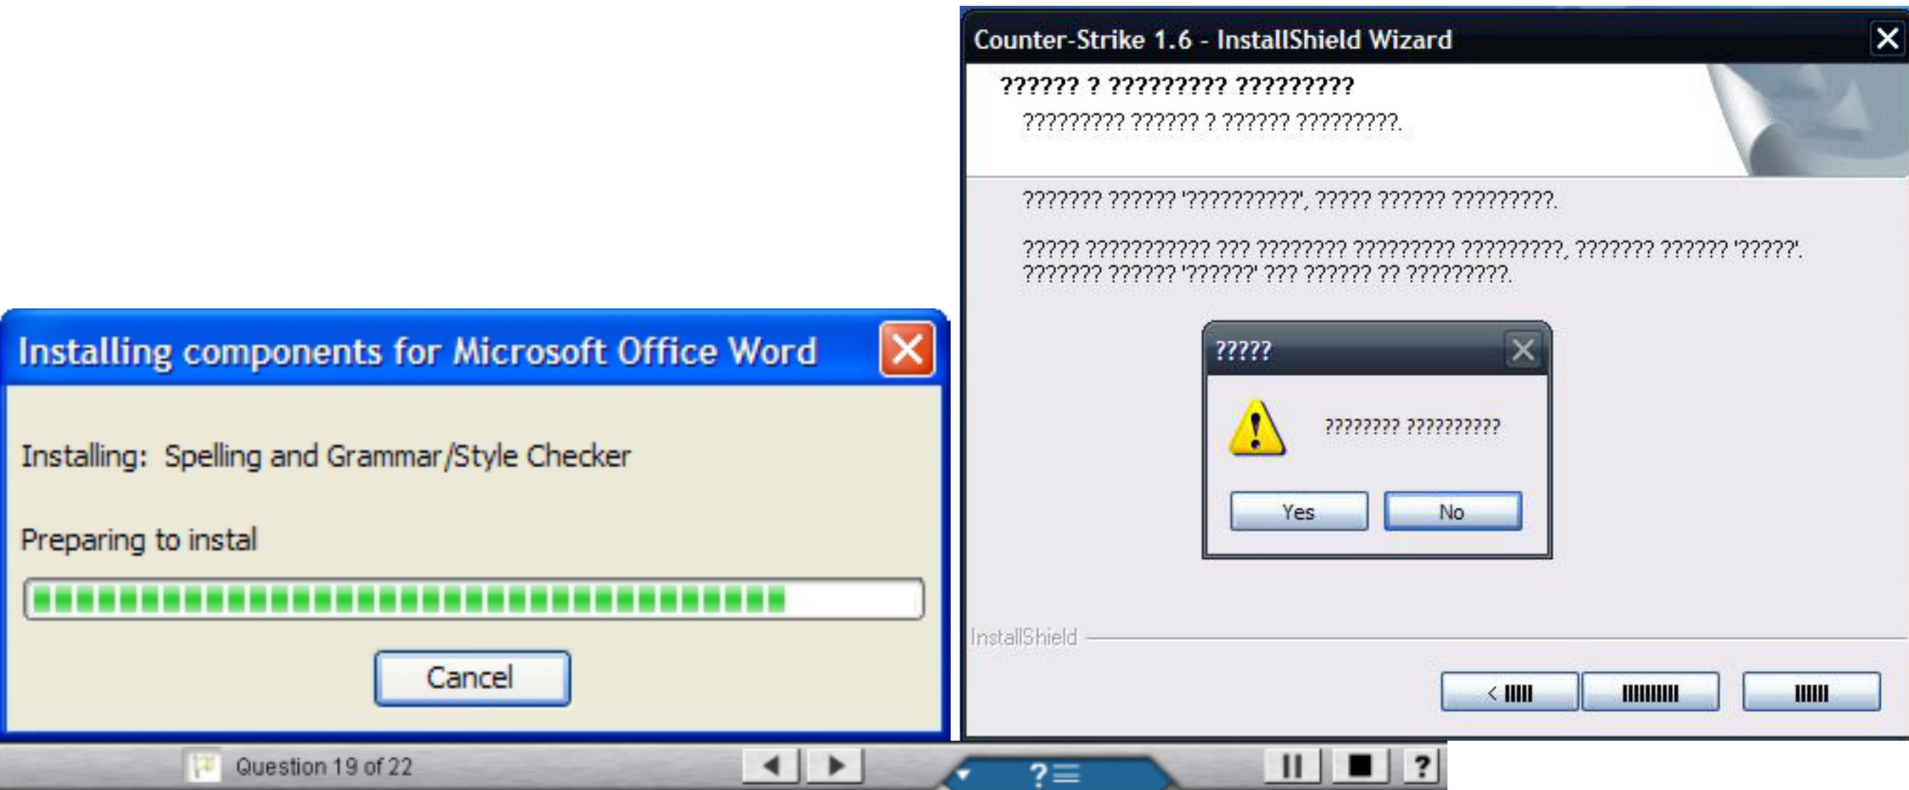

Select the correct answer.

The IDS monitors and collects network system information and analyzes it to detect attacks or intrusions.

- ☐ True
- ☐ I don't know

ML and the Amazing Polymorphic Let-Coat

- ML solution: slight extension of the predicative F_2
 - Introduce “let $x : \sigma = e_1$ in e_2 ”
 - With the semantics of “ $(\lambda x : \sigma. e_2) e_1$ ”
 - And typed as “ $[e_1/x] e_2$ ” (result: “fresh each time”)

$$\frac{\Gamma \vdash e_1 : \sigma \quad \Gamma, x : \sigma \vdash e_2 : \tau}{\Gamma \vdash \text{let } x : \sigma = e_1 \text{ in } e_2 : \tau}$$

- This lets us write the polymorphic sort as
let
 $s : \forall t. \tau = \Lambda t. \dots$ code for polymorphic sort ...
in
 ... $s \text{ [nat]} x \dots s \text{ [bool]} y$
- We have found the sweet spot!

ML and the Amazing Polymorphic Let-Coat

- ML solution: slight extension of the predicative F_2
 - Introduce “let $x : \sigma = e_1$ in e_2 ”
 - With the semantics of “ $(\lambda x : \sigma. e_2) e_1$ ”
 - And typed as “ $[e_1/x] e_2$ ” (result: “fresh each time”)

$$\frac{\Gamma \vdash e_1 : \sigma \quad \Gamma, x : \sigma \vdash e_2 : \tau}{\Gamma \vdash \text{let } x : \sigma = e_1 \text{ in } e_2 : \tau}$$

- This lets us write the polymorphic sort as
let

$s : \forall t. \tau = \Lambda t. \dots$ code for polymorphic sort ...

in

$\dots s [\text{nat}] x \dots s [\text{bool}] y$

- Surprise: this was a major ML design flaw!

ML Polymorphism and References

- let is evaluated using **call-by-value** but is typed using **call-by-name**
 - What if there are side effects?
- Example:
let $x : \forall t. (t \rightarrow t)$ **ref** = $\Lambda t. \text{ref } (\lambda x : t. x)$
in
 $x [\text{bool}] := \lambda x: \text{bool}. \text{not } x ;$
 $(! x [\text{int}]) 5$
 - Will apply “not” to 5
 - We need **invariant typing of references**
 - Similar examples can be constructed with exceptions
- It took **10 years** for PL researchers to find and agree on a clean solution

The Value Restriction in ML

- A type in a let is generalized *only for syntactic values*

$$\frac{\Gamma \vdash e_1 : \sigma \quad \Gamma, x : \sigma \vdash e_2 : \tau}{\Gamma \vdash \text{let } x : \sigma = e_1 \text{ in } e_2 : \tau} \quad \begin{array}{l} e_1 \text{ is a syntactic} \\ \text{value or } \sigma \text{ is} \\ \text{monomorphic} \end{array}$$

- Since e_1 is a value, its evaluation *cannot have side-effects*
- In this case call-by-name and call-by-value are the same
- In the previous example *ref* $(\lambda x:t. x)$ is *not a value*
- This is not too restrictive in practice!

Subtype Bounded Polymorphism

- We can bound the instances of a given type variable $\forall t < \tau. \sigma$
- Consider a function $f : \forall t < \tau. t \rightarrow \sigma$
- How is f different than $g : \tau \rightarrow \sigma$?
- One Answer: can invoke f on any subtype of τ
- Another: They are different if t appears in σ
 - e.g, let $f : \forall t < \tau. t \rightarrow t$ and $g : \tau \rightarrow \tau$ both be the identity function
 - Take $x : \tau'$ where $\tau' < \tau$
 - $f [\tau'] x$ has static type τ'
 - $g x$ (using subsumption) has static type τ
 - Since both have dynamic type τ' , we have **lost information with g**

Homework

- Homework 5
- “Vote”: Partners for HW6?